



OPTION 1
CATCH BASINS ALIGNED
ACROSS STREET

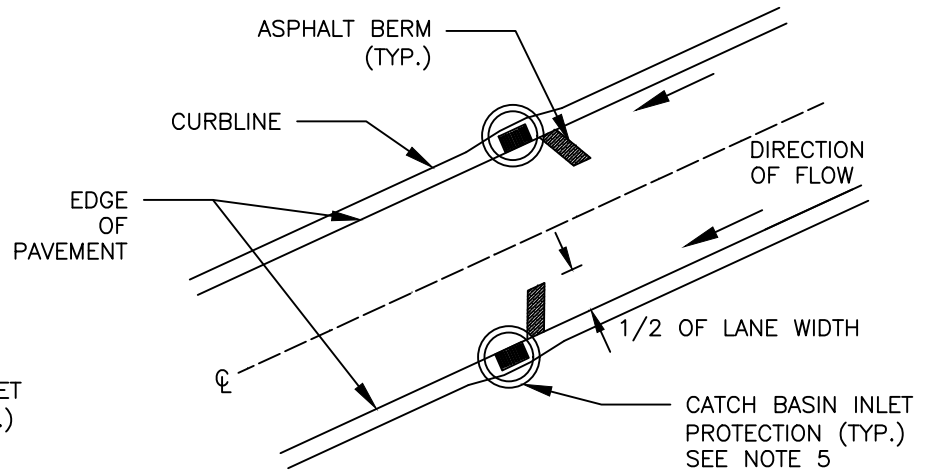

OPTION 2
CATCH BASINS OFFSET OR
INDIVIDUAL CATCH BASIN

NOTES:

1. TEMPORARY BERMS ARE INSTALLED TO ACHIEVE DESIGNED DRAINAGE AREAS PRIOR TO FINAL ASPHALT LIFT BEING INSTALLED ON ROAD SURFACE.
2. CONTRACTOR TO INSTALL TEMPORARY BERMS ON INTERMEDIATE COURSE, ON HIGH SIDE OF CURB INLETS FOR STRUCTURES ALONG THE STREET SLOPE.
3. REMOVE BERM PRIOR INSTALLING FINAL ASPHALT LIFT, FINISHING ROAD SURFACE.
4. REMOVE ACCUMULATED SEDIMENT FROM ABOVE BERM WEEKLY AND AFTER RAINFALL, AS NEEDED TO MAINTAIN FUNCTION.
5. CATCH BASIN INLET PROTECTION MAY BE OMITTED IF APPROVED BY EROSION CONTROL COORDINATOR

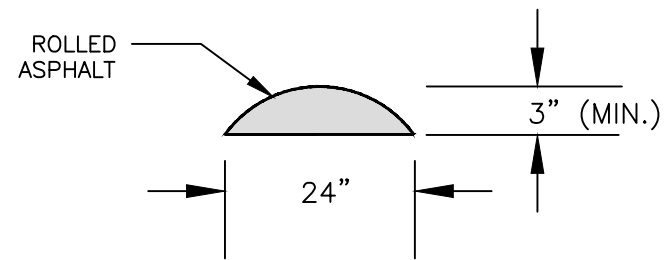

BERM CROSS SECTION

NOT TO SCALE



CITY OF CHARLOTTE
LAND DEVELOPMENT STANDARDS
INCLUDES CHARLOTTE ETJ

TEMPORARY ASPHALT DIVERSION BERM

| STD. NO. | REV. |
|----------|------|
| 30.18 | 21 |