


2:1 CUT MAX.
3:1 FILL MAX.

PLANTING STRIP - SEE NOTE 6
AMENITY ZONE - SEE NOTE 4


2:1 CUT MAX.
3:1 FILL MAX.

EITHER OF THESE PAVEMENT SECTIONS MAY BE USED:

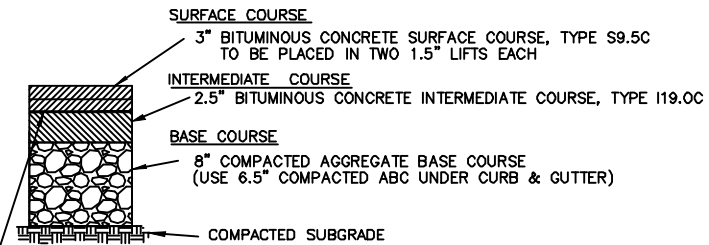

TYPICAL PAVEMENT SECTION WITH STONE BASE

APPLY TACK COAT PER NCDOT "STD. SPECS. FOR ROADS AND STRUCTURES," SECTION 605

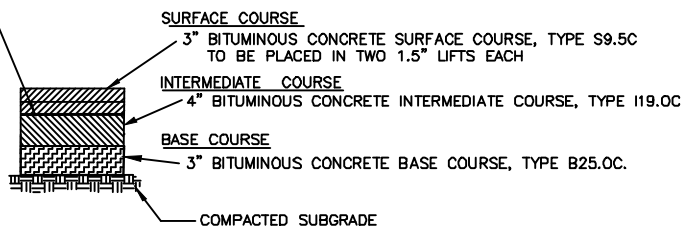

TYPICAL FULL-DEPTH ASPHALT PAVEMENT SECTION

NOTES:

1. USE OF VALLEY GUTTER PROHIBITED.
2. 2' BUFFER CAN BE SUE OR ADDITIONAL R/W.
3. AN ALTERNATIVE PAVEMENT DESIGN MAY BE REQUIRED BY CDOT BASED ON SPECIFIC TRAFFIC PARAMETERS.
4. IF AMENITY ZONE IS AUTHORIZED IN PLACE OF PLANTING STRIP, CONCRETE SHALL BE 4" THICK AND CROSS SLOPE SHALL BE 1.5% (2% MAX).
5. DEVELOPER MAY SUBMIT AN ALTERNATIVE PAVEMENT SECTION DESIGN TO CITY.
6. PLANTING STRIP ADJACENT TO SIDEWALK SHALL BE GRADED TO 1/4" PER FOOT (MIN.) UP TO 1 1/4" PER FOOT (MAX.), EXCEPT WHERE EXCESSIVE NATURAL GRADES MAKE THIS REQUIREMENT IMPRACTICAL. IN SUCH CASES, CDOT MAY AUTHORIZE A SUITABLE GRADE.

KEY

- (R) 2'-6" STANDARD CURB AND GUTTER, 2'-0" STANDARD CURB AND GUTTER, OR 2'-0" VALLEY GUTTER (SEE NOTE 1)
- (S) 4" CONCRETE SIDEWALK

NOT FOR USE IN ETJ

NOT TO SCALE



CITY OF CHARLOTTE
LAND DEVELOPMENT STANDARDS

LOCAL OFFICE/COMMERCIAL NARROW STREET
TYPICAL SECTION (6' SIDEWALK)

STD. NO.	REV.
U-04B	23