



EITHER OF THESE PAVEMENT SECTIONS MAY BE USED:

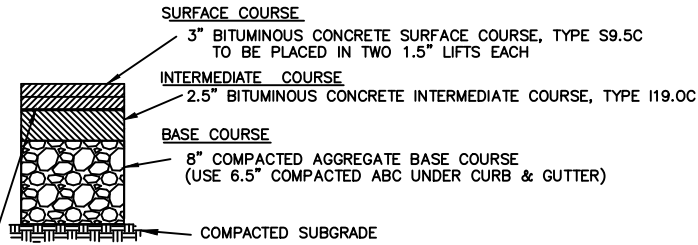

TYPICAL PAVEMENT SECTION WITH STONE BASE

APPLY TACK COAT PER NCDOT "STD. SPECS. FOR ROADS AND STRUCTURES," SECTION 605

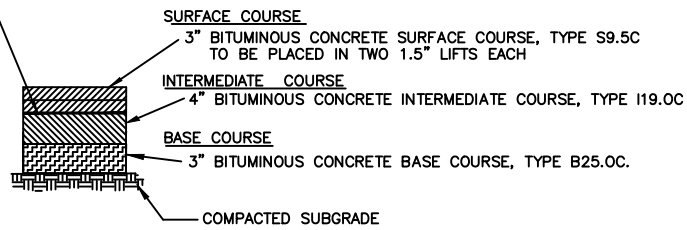

TYPICAL FULL-DEPTH ASPHALT PAVEMENT SECTION

NOTES:

1. USE OF VALLEY GUTTER IS PROHIBITED.
2. WIDER SIDEWALKS MAY BE REQUIRED UNDER CIRCUMSTANCES AS IDENTIFIED IN THE USDG.
3. DEVELOPER MAY SUBMIT AN ALTERNATIVE PAVEMENT DESIGN TO CITY.
4. AN ALTERNATIVE PAVEMENT DESIGN MAY BE REQUIRED BY CDOT/NCDOT BASED ON SPECIFIC TRAFFIC PARAMETERS.
5. IF AMENITY ZONE IS AUTHORIZED IN PLACE OF PLANTING STRIP, CONCRETE SHALL BE 4" THICK AND CROSS SLOPE SHALL BE 1.5% (2% MAX).
6. PLANTING STRIP ADJACENT TO SIDEWALK SHALL BE GRADED TO 1/4" PER FOOT (MIN.) UP TO 1 1/4" PER FOOT (MAX.), EXCEPT WHERE EXCESSIVE NATURAL GRADES MAKE THIS REQUIREMENT IMPRACTICAL. IN SUCH CASES, CDOT MAY AUTHORIZE A SUITABLE GRADE.
7. 2' BUFFER CAN BE SUE OR ADDITIONAL R/W

KEY

- (R) 2'-6" STANDARD CURB AND GUTTER ONLY
- (S) 4" CONCRETE SIDEWALK

NOT FOR USE IN ETJ

NOT TO SCALE



**CITY OF CHARLOTTE
LAND DEVELOPMENT STANDARDS**

LOCAL OFFICE/COMMERCIAL WIDE STREET AT
INTERSECTION WITH CURB EXTENSION TYPICAL SECTION
(8' SIDEWALK)

STD. NO.	REV.
U-05C1	23