



# DIAGRAM 3 WORK AREA ON SHOULDER (2' TO 6' OR MORE FROM PAVEMENT)

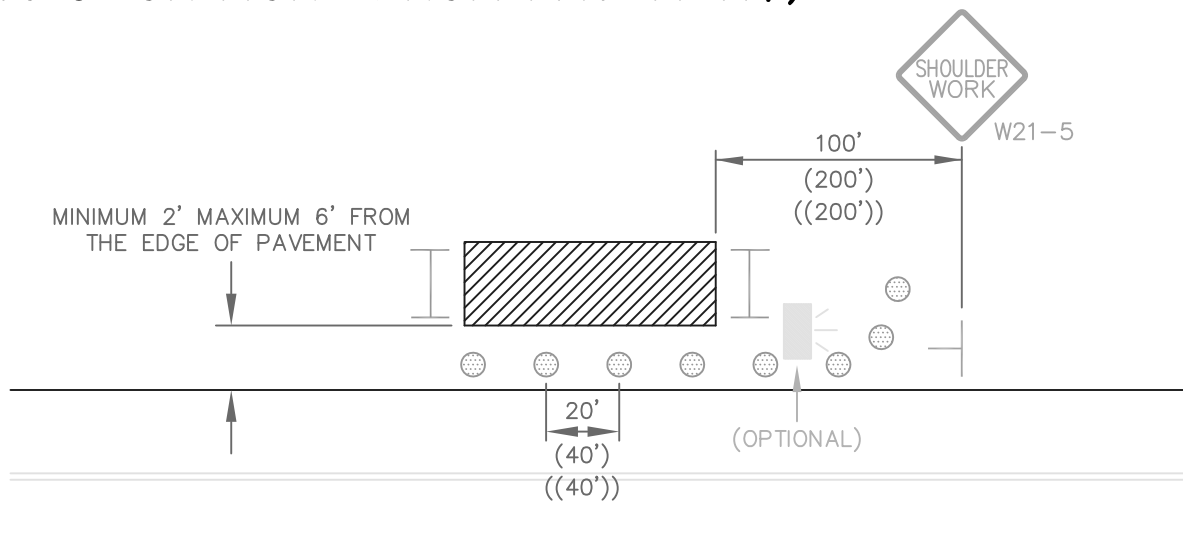

## NOTES:

1. SPACING – 25 M.P.H. OR LESS  
(SPACING) – 30 & 35 M.P.H.  
((SPACING)) – 40 M.P.H. OR MORE
2. TYPE III BARRICADE REQUIRED ONLY IF WORK ZONE IS LEFT UNATTENDED OVERNIGHT.
3. NO ADVANCED SIGNAGE REQUIRED IF 6' OR MORE OF CLEARANCE IS MAINTAINED FROM EDGE OF PAVEMENT.
4. WHEN EXCAVATING WITHIN 4' OF THE EDGE OF PAVEMENT, THE ADJACENT LANE SHOULD BE CLOSED TO TRAFFIC USING OTHER APPLICABLE DIAGRAMS UNLESS BRACING OR SHORING IS USED.
5. IF BIKE LANE IS PRESENT THE PROPER CLOSURE IS REQUIRED USING SIGNS AND CONES REFER TO DIAGRAM 31.

## LEGEND



ARROW PANEL DISPLAY  
(IF USED)