







DIAGRAM 27 WORK AREA IN LEFT LANES (MULTI-LANE, ONE WAY STREET)

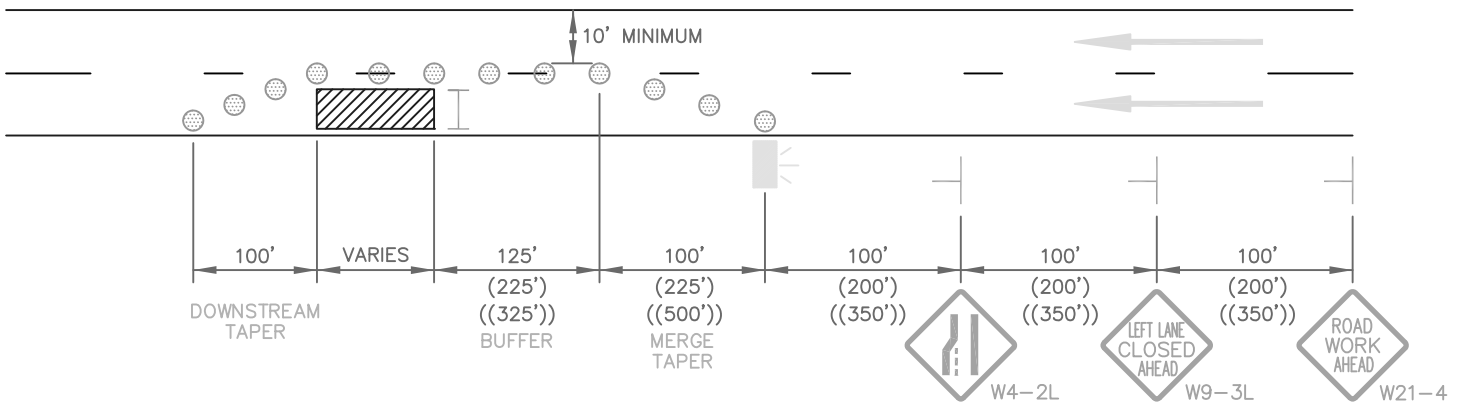

NOTES:

1. SPACING - 25 M.P.H. OR LESS
(SPACING) - 30 & 35 M.P.H.
((SPACING)) - 40 M.P.H. OR MORE
2. TYPE III BARRICADE REQUIRED ONLY IF WORK ZONE IS LEFT UNATTENDED OVERNIGHT.
3. IF CLOSURE IS LONG-TERM (SEE SECTION 16), PAVEMENT MARKINGS SHALL BE REVISED TO MATCH THE TRAFFIC PATTERN.
4. USE ALSO ON ONE-WAY STREETS OF TWO OR MORE LANES.
5. ARROW PANEL SHALL NOT BLOCK SIDEWALK OR PEDESTRIAN MOVEMENT.

LEGEND

-  CONES / DRUMS
-  TYPE III BARRICADE
-  SIGN
-  WORK AREA
-  ARROW PANEL



ARROW PANEL DISPLAY