


DIAGRAM 16 WORK AREA IN LEFT LANE (STREET WITH MEDIAN)



NOTES:

1. SPACING – 25 M.P.H. OR LESS
(SPACING) – 30 & 35 M.P.H.
((SPACING)) – 40 M.P.H. OR MORE
2. TYPE III BARRICADE REQUIRED ONLY IF WORK ZONE IS LEFT UNATTENDED OVERNIGHT.
3. IF CLOSURE IS LONG-TERM (SEE SECTION 16), PAVEMENT MARKINGS SHALL BE REVISED TO MATCH THE TRAFFIC PATTERN.
4. USE ALSO ON ONE-WAY STREETS OF 2 OR MORE LANES.
5. IF MEDIAN IS NOT SUFFICIENT WIDTH FOR PLACEMENT OF ADVANCE CONSTRUCTION WARNING SIGNS THEN USE "WORK AREA IN LEFT LANE (MULTI-LANE ROADWAY)" DIAGRAM 15.
6. USE OF AN ARROW PANEL AS SHOWN IS RECOMMENDED.
7. SIGN C13 MAY BE SUBSTITUTED FOR THE ARROW PANEL DURING DAYLIGHT OPERATIONS.

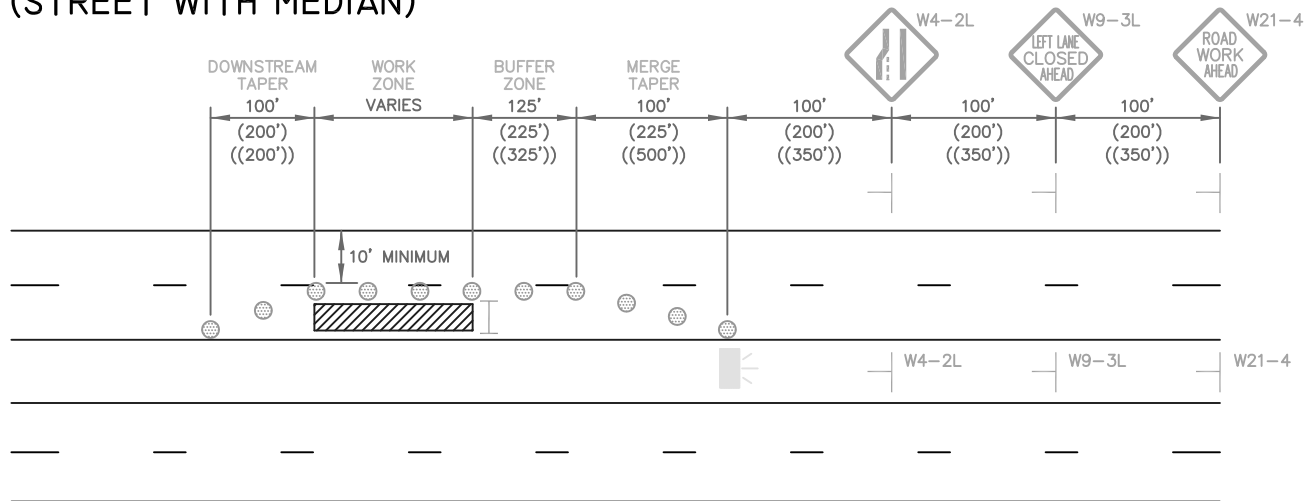