


DIAGRAM 4 **WORK AREA ON SHOULDER** **(MINOR ENCROACHMENT ON PAVEMENT)**

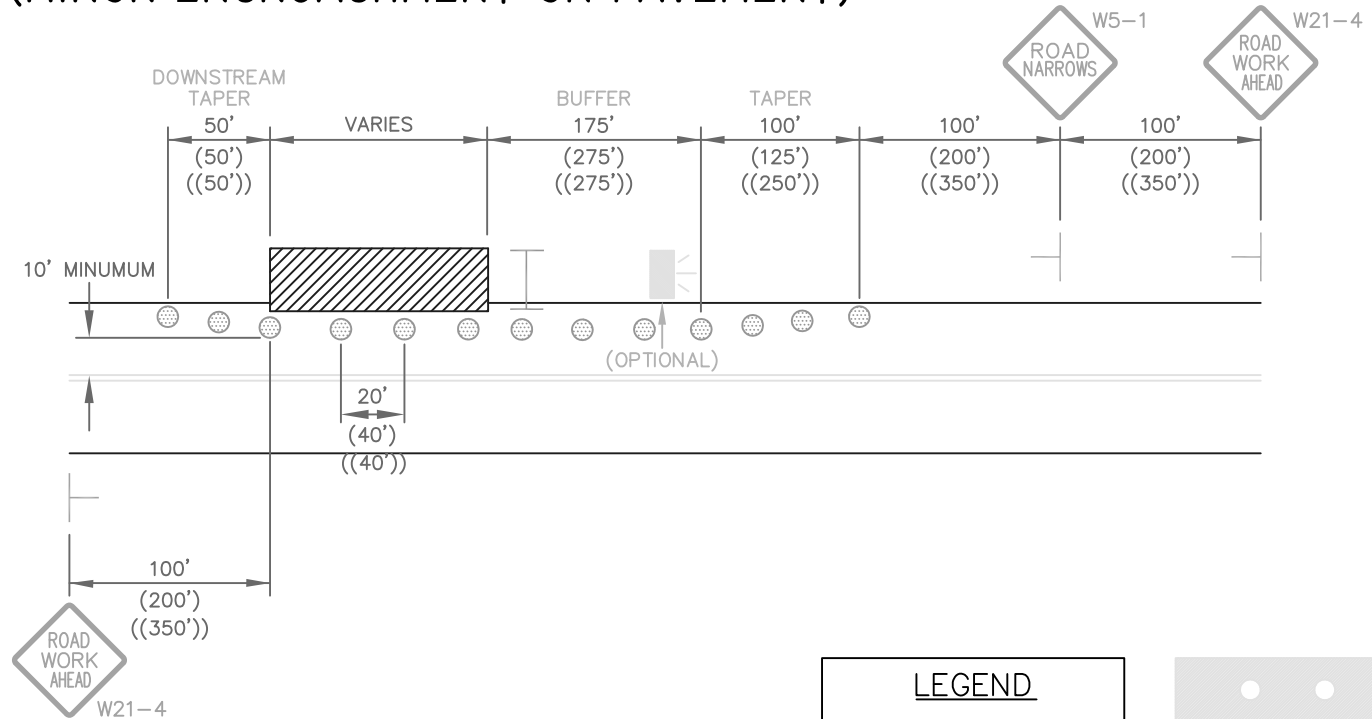

NOTES:

- SPACING – 25 M.P.H. OR LESS
(SPACING) – 30 & 35 M.P.H.
((SPACING)) – 40 M.P.H. OR MORE
- TYPE III BARRICADE REQUIRED ONLY IF WORK ZONE IS LEFT UNATTENDED OVERNIGHT.
- NO ADVANCED SIGNAGE REQUIRED IF 6' OR MORE OF CLEARANCE IS MAINTAINED FROM EDGE OF PAVEMENT.
- WHEN EXCAVATING WITHIN 4' OF THE EDGE OF PAVEMENT, THE ADJACENT LANE SHOULD BE CLOSED TO TRAFFIC USING OTHER APPLICABLE DIAGRAMS UNLESS BRACING OR SHORING IS USED.
- IF BIKE LANE IS PRESENT THE PROPER CLOSURE IS REQUIRED USING SIGNS AND CONES REFER TO DIAGRAM 31.

LEGEND

CONES / DRUMS
 TYPE III BARRICADE
 SIGN
 WORK AREA
 ARROW PANEL

ARROW PANEL DISPLAY
(IF USED)