


DIAGRAM 6
 WORK AREA IN TRAVEL LANE
 (MAINTAINING 2-WAY TRAFFIC)



- NOTES:
1. SPACING - 25 M.P.H. OR LESS
 (SPACING) - 30 & 35 M.P.H.
 ((SPACING)) - 40 M.P.H. OR MORE
 2. TYPE III BARRICADE REQUIRED ONLY IF WORK ZONE IS LEFT UNATTENDED OVERNIGHT.
 3. IF CLOSURE IS LONG-TERM (SEE SECTION 16), PAVEMENT MARKINGS SHALL BE REVISED TO MATCH THE TRAFFIC PATTERN. DRUMS ON CENTERLINE ARE NOT REQUIRED IF PAVEMENT MARKINGS ARE REVISED
 4. WHEN EXCAVATING WITHIN 4' OF THE EDGE OF PAVEMENT, THE ADJACENT LANE SHOULD BE CLOSED TO TRAFFIC USING OTHER APPLICABLE DIAGRAMS UNLESS BRACING OR SHORING IS USED.
 5. IF BIKE LANE IS PRESENT THE PROPER CLOSURE IS REQUIRED USING SIGNS AND CONES REFER TO DIAGRAM 31.

LEGEND	
	CONES / DRUMS
	TYPE III BARRICADE
	SIGN
	WORK AREA
	ARROW PANEL

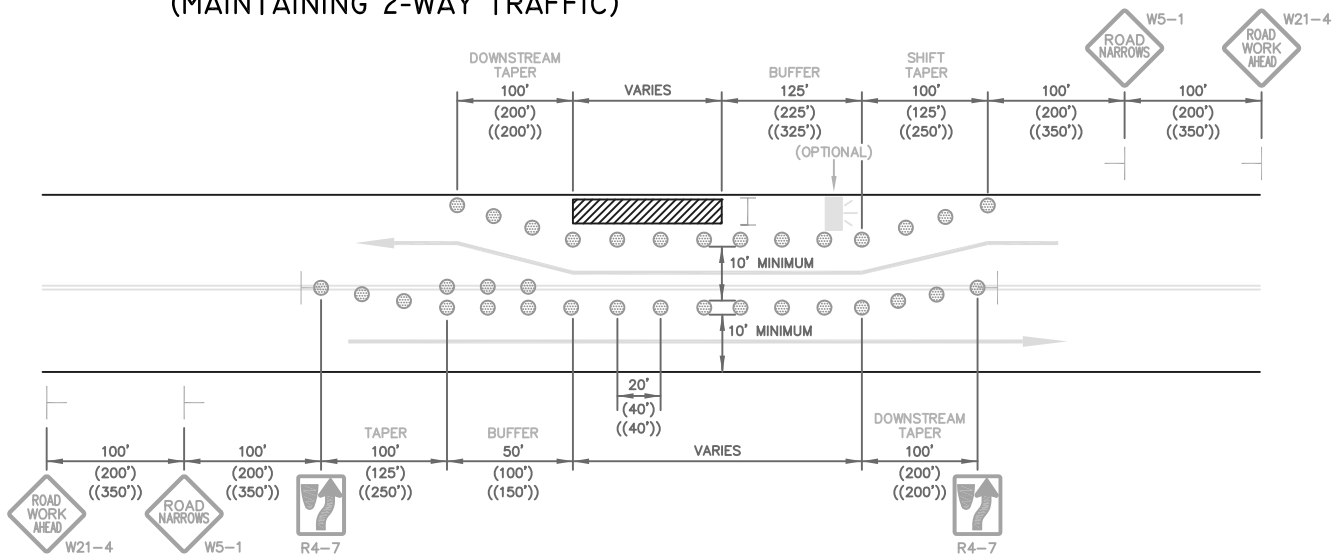