


DIAGRAM 25 WORK AREA IN RIGHT TWO LANES (3 OR MORE LANES IN ONE DIRECTION)

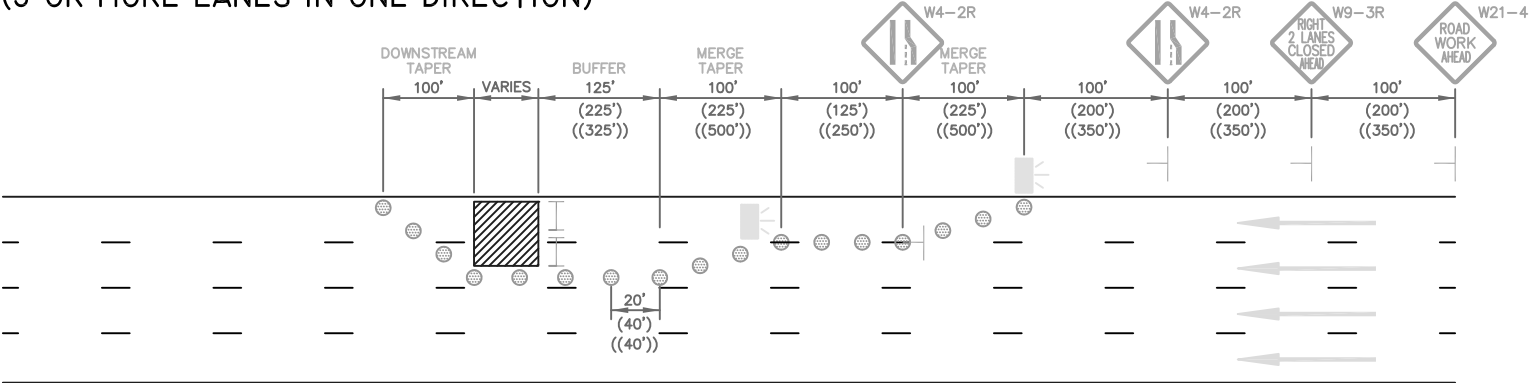

- NOTES:
1. SPACING – 25 M.P.H. OR LESS
(SPACING) – 30 & 35 M.P.H.
((SPACING)) – 40 M.P.H. OR MORE
 2. TYPE III BARRICADE REQUIRED ONLY IF WORK ZONE IS LEFT UNATTENDED OVERNIGHT.
 3. IF CLOSURE IS LONG-TERM (SEE SECTION 16), PAVEMENT MARKINGS SHALL BE REVISED TO MATCH THE TRAFFIC PATTERN.
 4. IF BIKE LANE IS PRESENT THE PROPER CLOSURE IS REQUIRED USING SIGNS AND CONES REFER TO DIAGRAM 31.
 5. ARROW PANEL SHALL NOT BLOCK SIDEWALK OR PEDESTRIAN MOVEMENT.

LEGEND

●

CONES / DRUMS

|||

TYPE III BARRICADE

—

SIGN

▨

WORK AREA

▮

ARROW PANEL

