


DIAGRAM 13 WORK AREA IN TRAVEL LANE (MULTI-LANE ROADWAY)



- NOTES:
1. SPACING - 25 M.P.H. OR LESS
(SPACING) - 30 & 35 M.P.H.
((SPACING)) - 40 M.P.H. OR MORE
 2. TYPE III BARRICADE REQUIRED ONLY IF WORK ZONE IS LEFT UNATTENDED OVERNIGHT.
 3. IF CLOSURE IS LONG-TERM (SEE SECTION 16), PAVEMENT MARKINGS SHALL BE REVISED TO MATCH THE TRAFFIC PATTERN.
 4. ON MEDIAN DIVIDED ROADWAYS PLACE A SECOND SET OF SIGNS C10, C4, AND C1 IN THE MEDIAN.
 5. IF BIKE LANE IS PRESENT THE PROPER CLOSURE IS REQUIRED USING SIGNS AND CONES REFER TO DIAGRAM 31.
 6. ARROW PANEL SHALL NOT BLOCK SIDEWALK OR PEDESTRIAN MOVEMENT.

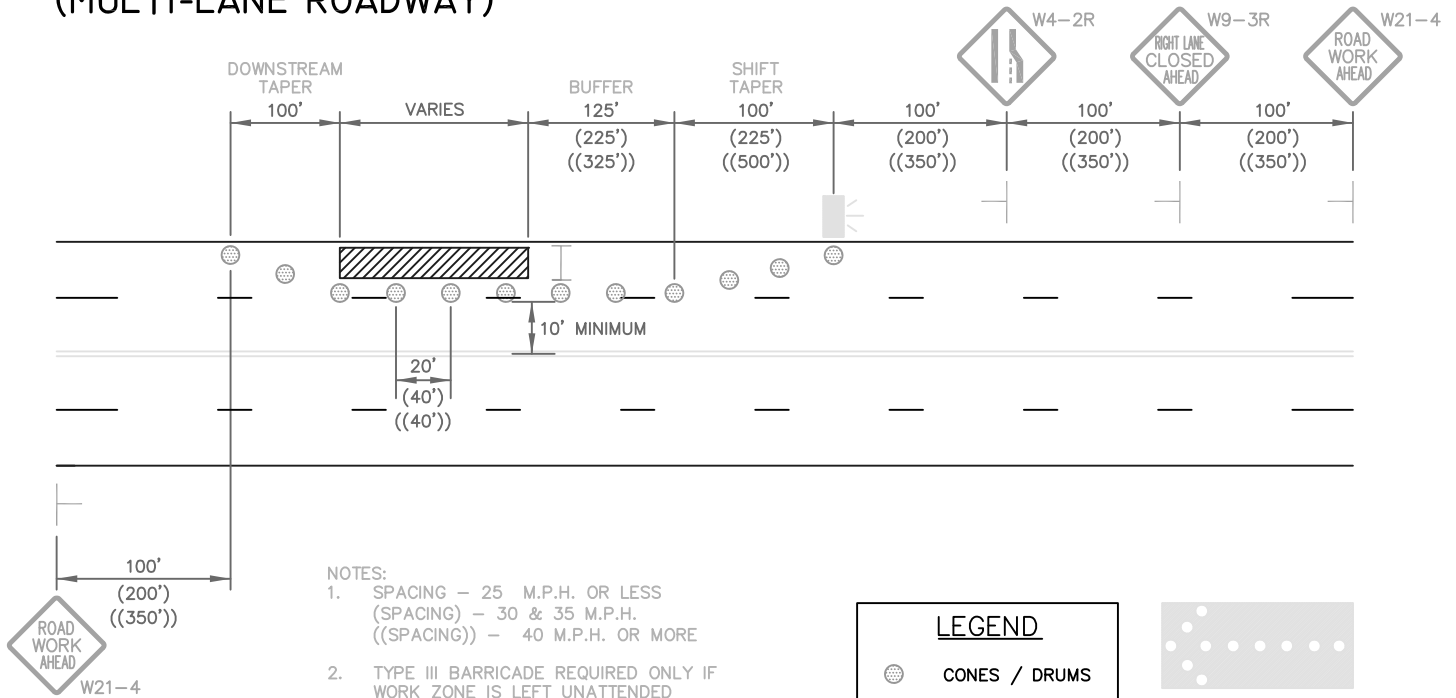