


DIAGRAM 14B  
RIGHT LANE CLOSURE ON FAR SIDE OF INTERSECTION  
(HIGH VOLUME OF RIGHT-TURN TRAFFIC)

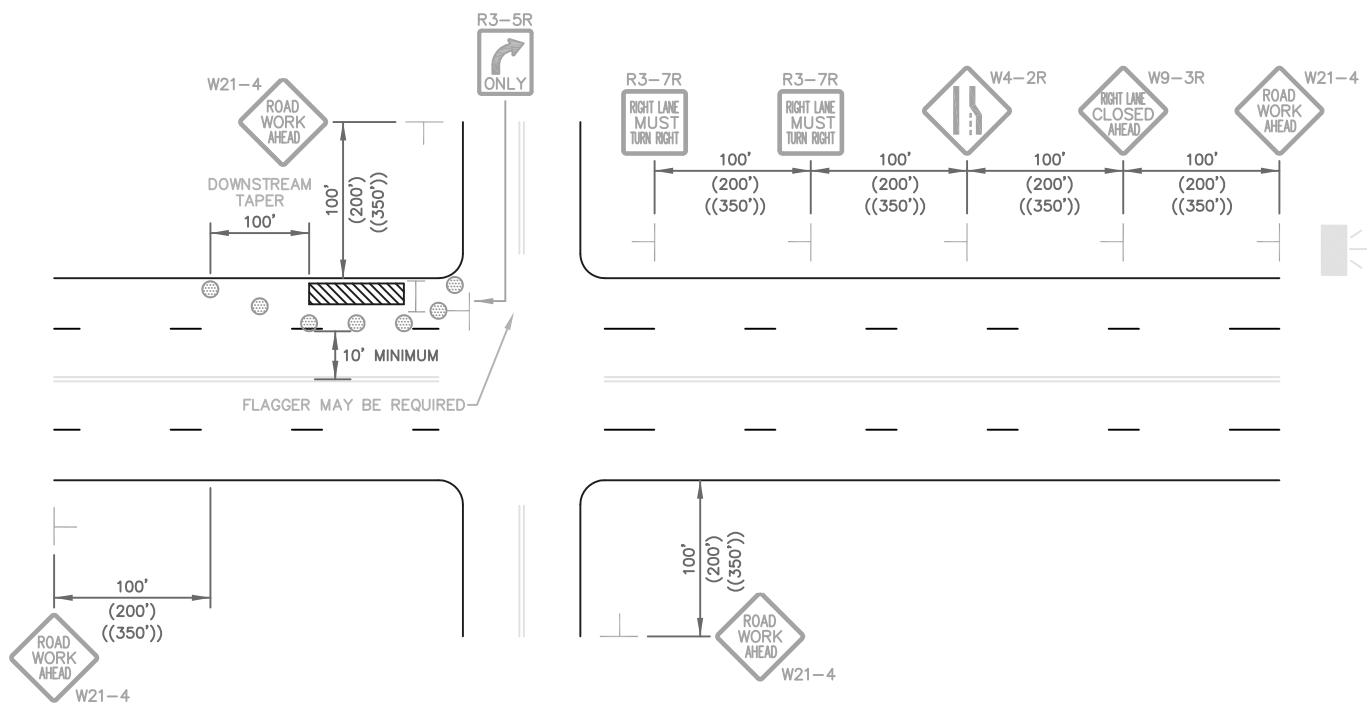

NOTES:

1. SPACING - 25 M.P.H. OR LESS  
(SPACING) - 30 & 35 M.P.H.  
((SPACING)) - 40 M.P.H. OR MORE
2. TYPE III BARRICADE REQUIRED AT ALL TIMES.
3. IF CLOSURE IS LONG-TERM (SEE SECTION 16), PAVEMENT MARKINGS SHALL BE REVISED TO MATCH THE TRAFFIC PATTERN.
4. USE THIS DIAGRAM IF THE WORK AREA IS WITHIN 350' (625') OF THE INTERSECTION.
5. IF BIKE LANE IS PRESENT THE PROPER CLOSURE IS REQUIRED USING SIGNS AND CONES REFER TO DIAGRAM 31.
6. ARROW PANEL SHALL NOT BLOCK THE SIDEWALK OR PEDESTRIAN MOVEMENT.

### LEGEND

