


SITE DATA TABLE	
PARCEL ID	219-091-26, 219-091-27, 219-091-28, 219-091-29
LOCATION	HAMILTON AND STEELE CREEK ROAD
JURISDICTION	CHARLOTTE
OWNER	KINGER HOMES LLC
ZONING	UR-2(CD)
TOTAL PARCEL AREA	7.691 AC - 334,976 SF
PROPOSED USE	SINGLE FAMILY ATTACHED TOWNHOMES
PROPOSED BUILDING PRODUCT	2-STORY TOWNHOUSE
UNIT DENSITY	32 UNITS TOTAL (4.16 UPA)
MIN. FRONT / STREET SETBACK	NEW STREETS = 14' BOC / HAMILTON = 25' R/W / STEELE CREEK = 30' R/W
MIN. SIDE SETBACK	5'
MIN. REAR SETBACK	10'
MAX. BUILDING HEIGHT	40'
PARKING SPACES REQUIRED	48 SPACES (1.5 SPACES PER UNIT)
REQUIRED TREE SAVE	15% - (50,246 SF - 1.15 AC)
MIN PROVIDED OPEN SPACE	15% - (50,246 SF - 1.15 AC)
FEMA MAP NUMBER	3710447900K
FEMA MAP DATE	9/2/2015
SOIL TYPES	CeB2 (65%), ApB (35%)
TRASH COLLECTION	TRASH: (1) 8 CY DUMPSTER - RECYCLE: 144 SF
BUFFER REQUIREMENTS	WEST & SOUTH: 42' TYPE C BUFFER EAST & NORTH: NO BUFFER
ALL ARCHITECTURAL DESIGN STANDARDS SHALL APPLY	
SITE LIGHTING BY OTHERS & SHALL COMPLY WITH LAND DEVELOPMENT STANDARDS	
PROJECT TO BE DEVELOPED IN TWO(2) PHASES	

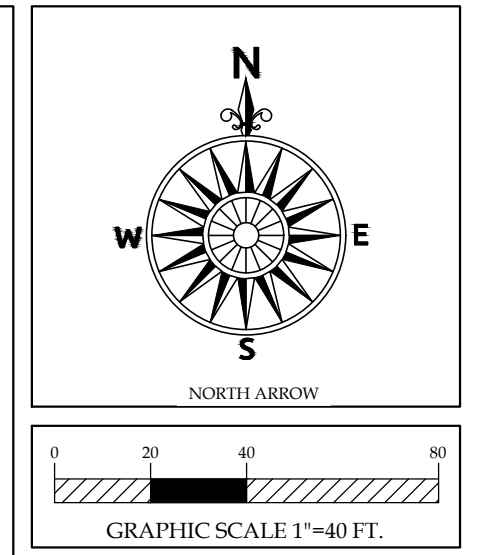

PRELIMINARY NOT FOR CONSTRUCTION

ENGINEER'S SEAL

LATITUDE 35 DESIGN GROUP
 1199 HAYBURN DRIVE
 KANANOLIE, NC 28081
 P: 704-856-1862
 NCRE REG. LIC. # C-8850

C03 - SITE PLAN DWG
 PROJECT NUMBER: 2021-002
 DATE: 11/01/2021 DRAWN BY: TSG

REVISIONS:

NOTE:
 1. SITE HAS BEEN PREVIOUSLY REZONED, REZONING CASE 2018-077.
 2. TYPICAL UNIT SIZE IS 30' X 51' (EXTERIOR UNIT) AND 26' X 51' (INTERIOR UNIT).

GARBAGE AND RECYCLE TO BE PROVIDED VIA ROLL OUT CANS STORED IN GARAGES OF UNITS, IN THE EVENT THAT CITY WASTE MANAGEMENT WILL NOT COLLECT TRASH AND RECYCLE PRIVATE COLLECTION WILL BE SOUGHT AFTER BY OWNERSHIP. PETITIONER COMMITS TO RESERVING AN AREA FOR FUTURE COMMUNAL DUMPSTER/RECYCLE AREA TO BE REVIEWED DURING CONSTRUCTION DOCUMENT PROCESS.

REZONING PLAN
 RZP-2021-075

TOWNS AT HAMILTON
 15500 & 15510 STEELE CREEK RD., CHARLOTTE NC 28273
 13301 & 13315 HAMILTON RD., CHARLOTTE NC 28278

LEGEND			
	PROJECT BOUNDARY		BUILDING HATCH
	PROPOSED BUILDING CURB AND GUTTER		FULL DEPTH ASPHALT
	BUILDING SETBACK		SIDEWALK
	IRRIGATION CONDUIT		HEAVY DUTY PAVEMENT
	EXISTING SURVEY		COMPACT CAR SPACE
	STOP SIGN W/ WHITE STOP BAR		PARKING ROW COUNT
	HANDICAPPED PARKING SYMBOL		

1. GENERAL PROVISIONS
 THESE DEVELOPMENT STANDARDS FORM PART OF THE REZONING PLAN ASSOCIATED WITH THE REZONING PETITION FILED BY KINGER HOMES LLC (THE "PETITIONER") TO ACCOMMODATE THE DEVELOPMENT OF A RESIDENTIAL TOWNHOME COMMUNITY ON APPROXIMATELY 7.491-ACRE SITE LOCATED ON 15500 & 15510 STEELE CREEK RD., 13301 & 13315 HAMILTON RD., CHARLOTTE NC 28278, WHICH IS MORE PARTICULARLY DEPICTED ON THE REZONING PLAN (THE "SITE"). THE SITE IS COMPRISED OF TAX PARCEL NUMBERS 21909127, 21909126, 21909128, 21909129.

DEVELOPMENT OF THE SITE SHALL BE GOVERNED BY THE REZONING PLAN, THESE DEVELOPMENT STANDARDS AND THE APPLICABLE PROVISIONS OF THE CITY OF CHARLOTTE ZONING ORDINANCE (THE "ORDINANCE"). UNLESS THE REZONING PLAN OR THESE DEVELOPMENT STANDARDS ESTABLISH MORE STRINGENT STANDARDS, THE REGULATIONS ESTABLISHED UNDER THE ORDINANCE FOR THE UR-2 (CD) ZONING DISTRICT SHALL GOVERN ALL DEVELOPMENT TAKING PLACE ON THE SITE.

THE DEVELOPMENT DEPICTED ON THE REZONING PLAN IS SCHEMATIC IN NATURE AND INTENDED TO DEPICT THE GENERAL ARRANGEMENT OF USES AND IMPROVEMENTS ON THE SITE, ACCORDINGLY, THE CONFIGURATIONS, PLACEMENTS AND SIZES OF THE BUILDING FOOTPRINTS AS WELL AS THE INTERNAL PUBLIC STREETS AND THE INTERNAL PRIVATE STREETS, ALLEYS OR DRIVES DEPICTED ON THE REZONING PLAN ARE SCHEMATIC IN NATURE AND, SUBJECT TO THE TERMS OF THESE DEVELOPMENT STANDARDS AND THE ORDINANCE, ARE SUBJECT TO MINOR ALTERATIONS OR MODIFICATIONS DURING THE DESIGN DEVELOPMENT AND CONSTRUCTION DOCUMENT PHASES.

FUTURE AMENDMENTS TO THE REZONING PLAN AND/OR THESE DEVELOPMENT STANDARDS MAY BE APPLIED FOR BY THE THEN OWNER OR OWNERS OF THE SITE IN ACCORDANCE WITH THE PROVISIONS OF SECTION 6.207 OF THE ORDINANCE.

2. PERMITTED USES AND MAXIMUM DEVELOPMENT
 THE SITE MAY BE DEVELOPED WITH UP TO 32 SINGLE-FAMILY ATTACHED DWELLING UNITS (TOWNHOMES), TOGETHER WITH ANY INCIDENTAL AND ACCESSORY USES RELATED THERETO THAT ARE ALLOWED IN THE UR-2 (CD) ZONING DISTRICT.

3. TRANSPORTATION
 A) VEHICULAR ACCESS WILL BE AS GENERALLY DEPICTED ON THE REZONING PLAN. THE PLACEMENT AND CONFIGURATION OF THE VEHICULAR ACCESS POINT SHOWN ON THE REZONING PLAN IS SUBJECT TO ANY MINOR MODIFICATIONS REQUIRED TO ACCOMMODATE FINAL SITE AND CONSTRUCTION PLANS AND DESIGNS AND TO ANY ADJUSTMENTS REQUIRED BY CDOT AND/OR NCDOT FOR APPROVAL.
 B) AS DEPICTED ON THE REZONING PLAN, THE SITE WILL BE SERVED BY PUBLIC AND/OR PRIVATE STREETS.

C) INTERNAL SIDEWALKS AND PEDESTRIAN CONNECTIONS SHALL BE PROVIDED ALONG ALL PUBLIC AND PRIVATE STREETS THROUGHOUT THE SITE. THE INTERNAL SIDEWALKS MAY MEANDER TO SAVE EXISTING TREES.

D) WHERE NECESSARY, PETITIONER SHALL DEDICATE AND CONVEY IN FEE SIMPLE ALL RIGHTS-OF-WAY TO THE CITY OF CHARLOTTE BEFORE THE SITE'S FIRST BUILDING CERTIFICATE OF OCCUPANCY IS ISSUED OR PHASED PER THE SITE'S DEVELOPMENT PLAN. THE RIGHT-OF-WAY SHALL BE SET AT 2 FEET BEHIND THE BACK OF SIDEWALK WHERE FEASIBLE.

E) UNLESS OTHERWISE STATED HEREIN, ALL TRANSPORTATION IMPROVEMENTS ON THE REZONING PLAN SHALL BE APPROVED AND CONSTRUCTED PRIOR TO THE ISSUANCE OF THE FIRST CERTIFICATE OF OCCUPANCY FOR PRINCIPAL BUILDINGS WITHIN THE SITE.

F) AS DEPICTED ON THE REZONING PLAN, PETITIONER WILL COMMIT TO CONSTRUCT AN 8-FT PLANTING STRIP AND 12-FT MULTI-USE PATH ALONG ROAD FRONTAGE OF HAMILTON ROAD AND STEELE CREEK ROAD. THE REZONING PLAN IS SUBJECT TO ANY MINOR MODIFICATIONS REQUIRED TO ACCOMMODATE FINAL SITE AND CONSTRUCTION PLANS AND DESIGNS AND TO ANY ADJUSTMENTS REQUIRED BY CDOT AND/OR NCDOT FOR APPROVAL.

G) ROAD IMPROVEMENTS ALONG HAMILTON ROAD WILL BE GENERALLY DEPICTED ON THE REZONING PLAN. FINAL DESIGN AND CONFIGURATION IS SUBJECT TO ANY MODIFICATIONS REQUIRED TO ACCOMMODATE FINAL SITE AND CONSTRUCTION PLANS AND DESIGNS AND TO ANY ADJUSTMENTS REQUIRED BY NCDOT FOR APPROVAL.

H) ALL PUBLIC ROADWAY IMPROVEMENTS WILL BE SUBJECT TO THE STANDARDS AND CRITERIA OF CDOT AND NCDOT, AS APPLICABLE. TO THE ROADWAY IMPROVEMENTS WITHIN THEIR RESPECTIVE ROAD SYSTEM AUTHORITY. IT IS UNDERSTOOD THAT SUCH IMPROVEMENTS MAY BE UNDERTAKEN BY THE PETITIONER ON ITS OWN OR IN CONJUNCTION WITH OTHER DEVELOPMENT OR ROADWAY PROJECTS TAKING PLACE WITHIN THE BROAD SOUTH MECKLENBURG AREA, BY WAY OF PRIVATE/PUBLIC PARTNERSHIP EFFORTS OR OTHER PUBLIC SECTOR PROJECT SUPPORT.

4. ARCHITECTURAL STANDARDS
 A) THE PRIMARY EXTERIOR BUILDING MATERIALS TO BE CONSTRUCTED ON SITE WILL BE A COMBINATION OF PORTIONS OF THE FOLLOWING: BRICK VENEER OR SIMILAR MASONRY PRODUCTS, STONE, MANUFACTURED STONE, AND CEMENTITIOUS SIDING.

B) EACH ATTACHED RESIDENTIAL DWELLING UNIT SHALL BE PROVIDED WITH AT LEAST A 2 CAR GARAGE.

C) TOWNHOUSE BUILDINGS WILL BE LIMITED TO 4 INDIVIDUAL UNITS OR FEWER OR WILL BE DIFFERENTIATED BETWEEN UNITS, INCLUDING, BUT NOT LIMITED TO, FORWARD OFFSETS IN THE FRONT WALLS OF UNITS, VERTICAL HEIGHT DIFFERENCES, OR ARCHITECTURAL DIFFERENCES IN ELEVATIONS (SUCH AS WINDOWS, DOORS, BAYS, TRIM, OR MATERIALS).

D) USABLE PORCHES AND STOOPS SHALL FORM A PREDOMINANT FEATURE OF THE BUILDING DESIGN AND BE LOCATED ON THE FRONT AND/OR REAR OF THE BUILDING. USABLE FRONT PORCHES SHALL BE COVERED AND BE AT LEAST 6 FEET DEEP.

E) TO PROVIDE PRIVACY, ALL RESIDENTIAL ENTRANCES WITHIN 15 FEET OF THE SIDEWALK MUST BE RAISED FROM THE AVERAGE SIDEWALK GRADE A MINIMUM OF 24 INCHES.

F) PITCHED ROOFS, IF PROVIDED, SHALL BE SYMMETRICALLY SLOPED NO LESS THAN 5:12, EXCEPT THAT ROOFS FOR PORCHES AND ATTACHED SHEDS MAY BE NO LESS THAN 2:12, UNLESS A FLAT ROOF ARCHITECTURAL STYLE IS EMPLOYED.

G) ALL CORNER/END UNITS THAT FACE A PUBLIC OR PRIVATE STREET SHALL HAVE A PORCH OR STOOP THAT WRAPS A PORTION OF THE FRONT AND SIDE OF THE UNIT OR PROVIDE BLANK WALL PROVISIONS THAT LIMIT THE MAXIMUM BLANK WALL EXPOSURE TO 10 FEET ON ALL BUILDING LEVELS.

H) GARAGE DOORS VISIBLE FROM PUBLIC OR PRIVATE NETWORK REQUIRED STREETS SHALL MINIMIZE THE VISUAL IMPACT BY PROVIDING A SETBACK OF 12 TO 24 INCHES FROM THE FRONT WALL PLANE OR ADDITIONAL ARCHITECTURAL TREATMENTS SUCH AS TRANSLUCENT WINDOWS AND PROJECTING ELEMENTS OVER THE GARAGE DOOR OPENING.

I) WALKWAYS SHALL BE PROVIDED TO CONNECT ALL RESIDENTIAL ENTRANCES TO SIDEWALKS ALONG PUBLIC AND PRIVATE STREETS.

5. OPEN SPACE, STREETScape AND LANDSCAPING
 A) THE PETITIONER SHALL COMPLY WITH THE TREE ORDINANCE AND POST CONSTRUCTION STORMWATER ORDINANCE.

B) 15% TREE SAVE TO BE PRESERVED ON SITE.

6. LIGHTING
 A) ALL FREESTANDING LIGHTING FIXTURES INSTALLED ON THE SITE (EXCLUDING LOWER, DECORATIVE LIGHTING THAT MAY BE INSTALLED ALONG THE DRIVEWAYS AND SIDEWALKS AND LANDSCAPING LIGHTING) SHALL BE FULLY CAPPED AND SHIELDED AND THE ILLUMINATION DOWNWARDLY DIRECTED SO THAT DIRECT ILLUMINATION DOES NOT EXTEND PAST ANY PROPERTY LINE OF THE SITE.
 B) THE MAXIMUM HEIGHT OF ANY FREESTANDING LIGHTING FIXTURES INSTALLED ON THE SITE, EXCLUDING STREET LIGHTS LOCATED ALONG PUBLIC STREETS, SHALL BE 21 FEET.

7. FIRE
 A) FIRE DEPARTMENT ACCESS ROAD INCLUDING ALLEYS SHALL HAVE A MIN. 20' UNOBSTRUCTED CLEAR WIDTH AND SHALL BE CAPABLE OF SUPPORTING 80,000 POUNDS.
 B) TURN RADIUS 30' INSIDE AND 42' OUTSIDE.

C) FIRE HYDRANT SHALL BE LOCATED WITHIN 750' TO THE MOST REMOTE POINT OF BUILDING AS TRUCK TRAVEL FOR ALL BUILDINGS.

D) ISO NEEDED FIRE FLOW/TOWNHOMES: (1) TOWNHOMES NOT EXCEEDING 2 STORIES IN HEIGHT, THE REQUIRED FIRE FLOW IS 1500 GPM; (2) TOWNHOMES NOT EXCEEDING 3 STORIES IN HEIGHT AND A FIRE AREA OF 2500 SQ. FT. OR LESS, THE REQUIRED FIRE FLOW IS 1750 GPM; (3) TOWNHOMES NOT EXCEEDING 3 STORIES IN HEIGHT AND A FIRE AREA OF GREATER THAN 2500 SQ. FT., THE REQUIRED FIRE FLOW IS 2000 GPM.

8. AMENDMENTS TO REZONING PLAN
 FUTURE AMENDMENTS TO THE TECHNICAL DATA SHEET OR THESE DEVELOPMENT STANDARDS MAY BE APPLIED FOR BY THE THEN OWNER OR OWNERS OF THE PARCEL OR PARCELS WITHIN THE SITE INVOLVED IN ACCORDANCE WITH THE PROVISIONS OF CHAPTER 6 OF THE ORDINANCE.

FURTHER ALTERATIONS OR MODIFICATIONS TO THIS REZONING PLAN WHICH, IN THE OPINION OF THE PLANNING DIRECTOR, SUBSTANTIALLY ALTER THE CHARACTER OF THE DEVELOPMENT OR SIGNIFICANTLY ALTER THE TECHNICAL DATA SHEET OR ANY OF ITS CONDITIONS OR WHICH INCREASE THE INTENSITY OF DEVELOPMENT SHALL NOT BE DEEMED TO BE MINOR AND MAY ONLY BE MADE IN ACCORDANCE WITH THE PROVISIONS OF SUBSECTIONS 6.207(1) OR (2) OF THE ORDINANCE, AS APPLICABLE.

9. ENVIRONMENTAL FEATURES
 A) THE LOCATION, SIZE, AND TYPE OF STORM WATER MANAGEMENT SYSTEMS DEPICTED ON THE REZONING PLAN ARE SUBJECT TO REVIEW AND APPROVAL AS PART OF THE FULL DEVELOPMENT PLAN SUBMITTAL AND ARE NOT IMPLICITLY APPROVED WITH THE REZONING. ADJUSTMENTS MAY BE NECESSARY IN ORDER TO ACCOMMODATE ACTUAL STORM WATER TREATMENT REQUIREMENTS AND NATURAL SITE DISCHARGE POINTS.

B) DEVELOPMENT WITHIN ANY SWIM/PCSO BUFFER SHALL BE COORDINATED WITH AND SUBJECT TO APPROVAL BY CHARLOTTE-MECKLENBURG STORM WATER SERVICES AND MITIGATED IF REQUIRED BY CITY ORDINANCE.

C) DEVELOPMENT OF THE SITE SHALL COMPLY WITH THE TREE ORDINANCE.

D) FOR ADJOINING PARCELS RECEIVING STORM WATER DISCHARGE THE PETITIONER SHALL ANALYZE THE ADEQUACY OF THE EXISTING STORM WATER CONVEYANCE ON THE ADJOINING PARCELS TO MALLARD LANDING ROAD. IF THE EXISTING STORM WATER CONVEYANCE ON THE ADJOINING PARCELS IS FOUND TO BE INADEQUATE, THE PETITIONER SHALL MAKE A GOOD FAITH EFFORT WITH THE PROPERTY OWNER(S) TO IMPROVE THE STORM WATER CONVEYANCE OR MITIGATE THE STORM WATER DISCHARGE ONTO THE ADJOINING PARCELS.

10. BINDING EFFECT OF THE REZONING DOCUMENTS AND DEFINITIONS
 A) IF THIS REZONING PLAN IS APPROVED, ALL CONDITIONS APPLICABLE TO DEVELOPMENT OF THE SITE IMPOSED UNDER THE TECHNICAL DATA SHEET WILL, UNLESS AMENDED IN THE MANNER PROVIDED UNDER THE ORDINANCE, BE BINDING UPON AND INURE TO THE BENEFIT OF THE PETITIONER AND THE CURRENT AND SUBSEQUENT OWNERS OF THE SITE AND THEIR RESPECTIVE SUCCESSORS IN INTEREST AND ASSIGNS.

B) THROUGHOUT THESE DEVELOPMENT STANDARDS, THE TERMS, "PETITIONER" AND "OWNER" AND "OWNERS" SHALL BE DEEMED TO INCLUDE THE HEIRS, DEVISEES, PERSONAL REPRESENTATIVES, SUCCESSORS IN INTEREST AND ASSIGNS OF THE PETITIONER OR THE OWNERS OF THE SITE FROM TIME TO TIME WHO MAY BE INVOLVED IN ANY FUTURE DEVELOPMENT THEREOF.

IN THE EVENT LAND IS SOLD WITH ATTACHED UNITS, THE PETITIONER WILL PROVIDE EITHER 400 SQFT OF PRIVATE OPEN SPACE PER UNIT OR PROVIDE USABLE COMMON OPEN SPACE EQUAL TO AT LEAST 10% OF THE SITE AS REQUIRED BY THE ZONING ORDINANCE. IF COMMON OPEN SPACE IS PROVIDED, AMENITIES SHALL INCLUDE AT LEAST TWO (2) OF THE FOLLOWING ENHANCEMENTS: SOFT TRAILS, HARDCAPE FEATURES, SEATING AREAS, BENCHES, AND/OR ENHANCED LANDSCAPING.

NORTH ARROW

PRELIMINARY
 NOT FOR
 CONSTRUCTION

ENGINEER'S SEAL

LATITUDE 35
 DESIGN GROUP
 1199 DAVENPORT DRIVE
 KANNAPOLIS NC 28081
 P: 704-956-1862
 NCDRE.LIC. # C-8850

C03 - SITE PLAN.DWG

PROJECT NUMBER: 2021-002

DATE: 11/01/2021 DRAWN BY: TSG

REVISIONS:

REZONING PLAN - CONDITIONS
 RZP-2021-075

TOWNS AT HAMILTON

15500 & 15510 STEELE CREEK RD., CHARLOTTE NC 28273
 13301 & 13315 HAMILTON RD., CHARLOTTE NC 28278



SHEET C02