

VICINITY MAP
SCALE: NOT TO SCALE



SITE DATA

TOTAL ACREAGE: ± 37.04AC
 NET ACREAGE: ± 30.98
 PARCEL NUMBERS: 05109101, 05109106
 SITE ADDRESS: 12900 N TRYON STREET
 CHARLOTTE, NORTH CAROLINA 28262

WATERSHED: MALLARD
 EXISTING ZONING: R3 MECKLENBURG COUNTY
 EXISTING USES: WOODED/VACANT
 PROPOSED ZONING: R-12 MF (CHARLOTTE)
 PROPOSED USE: APARTMENTS
 PROPOSED UNITS: UP TO 352 APARTMENT UNITS
 BUILDINGS NOT TO EXCEED: 16 BUILDINGS

SETBACKS
 THOROUGHFARE SETBACK: 30' (TYVOLA)
 FRONT SETBACK: 15' / 27' PER SECTION 9.303.(19)(F) OF THE ORDINANCE
 REAR YARD: 50'
 SIDE YARD: 20'

TREE SAVE
 REQUIRED TREE SAVE AREA: 5.57 ACRES (15%)
 PROPOSED TREE SAVE AREA: 5.57 ACRES (15%)

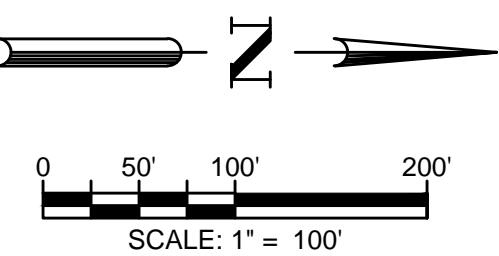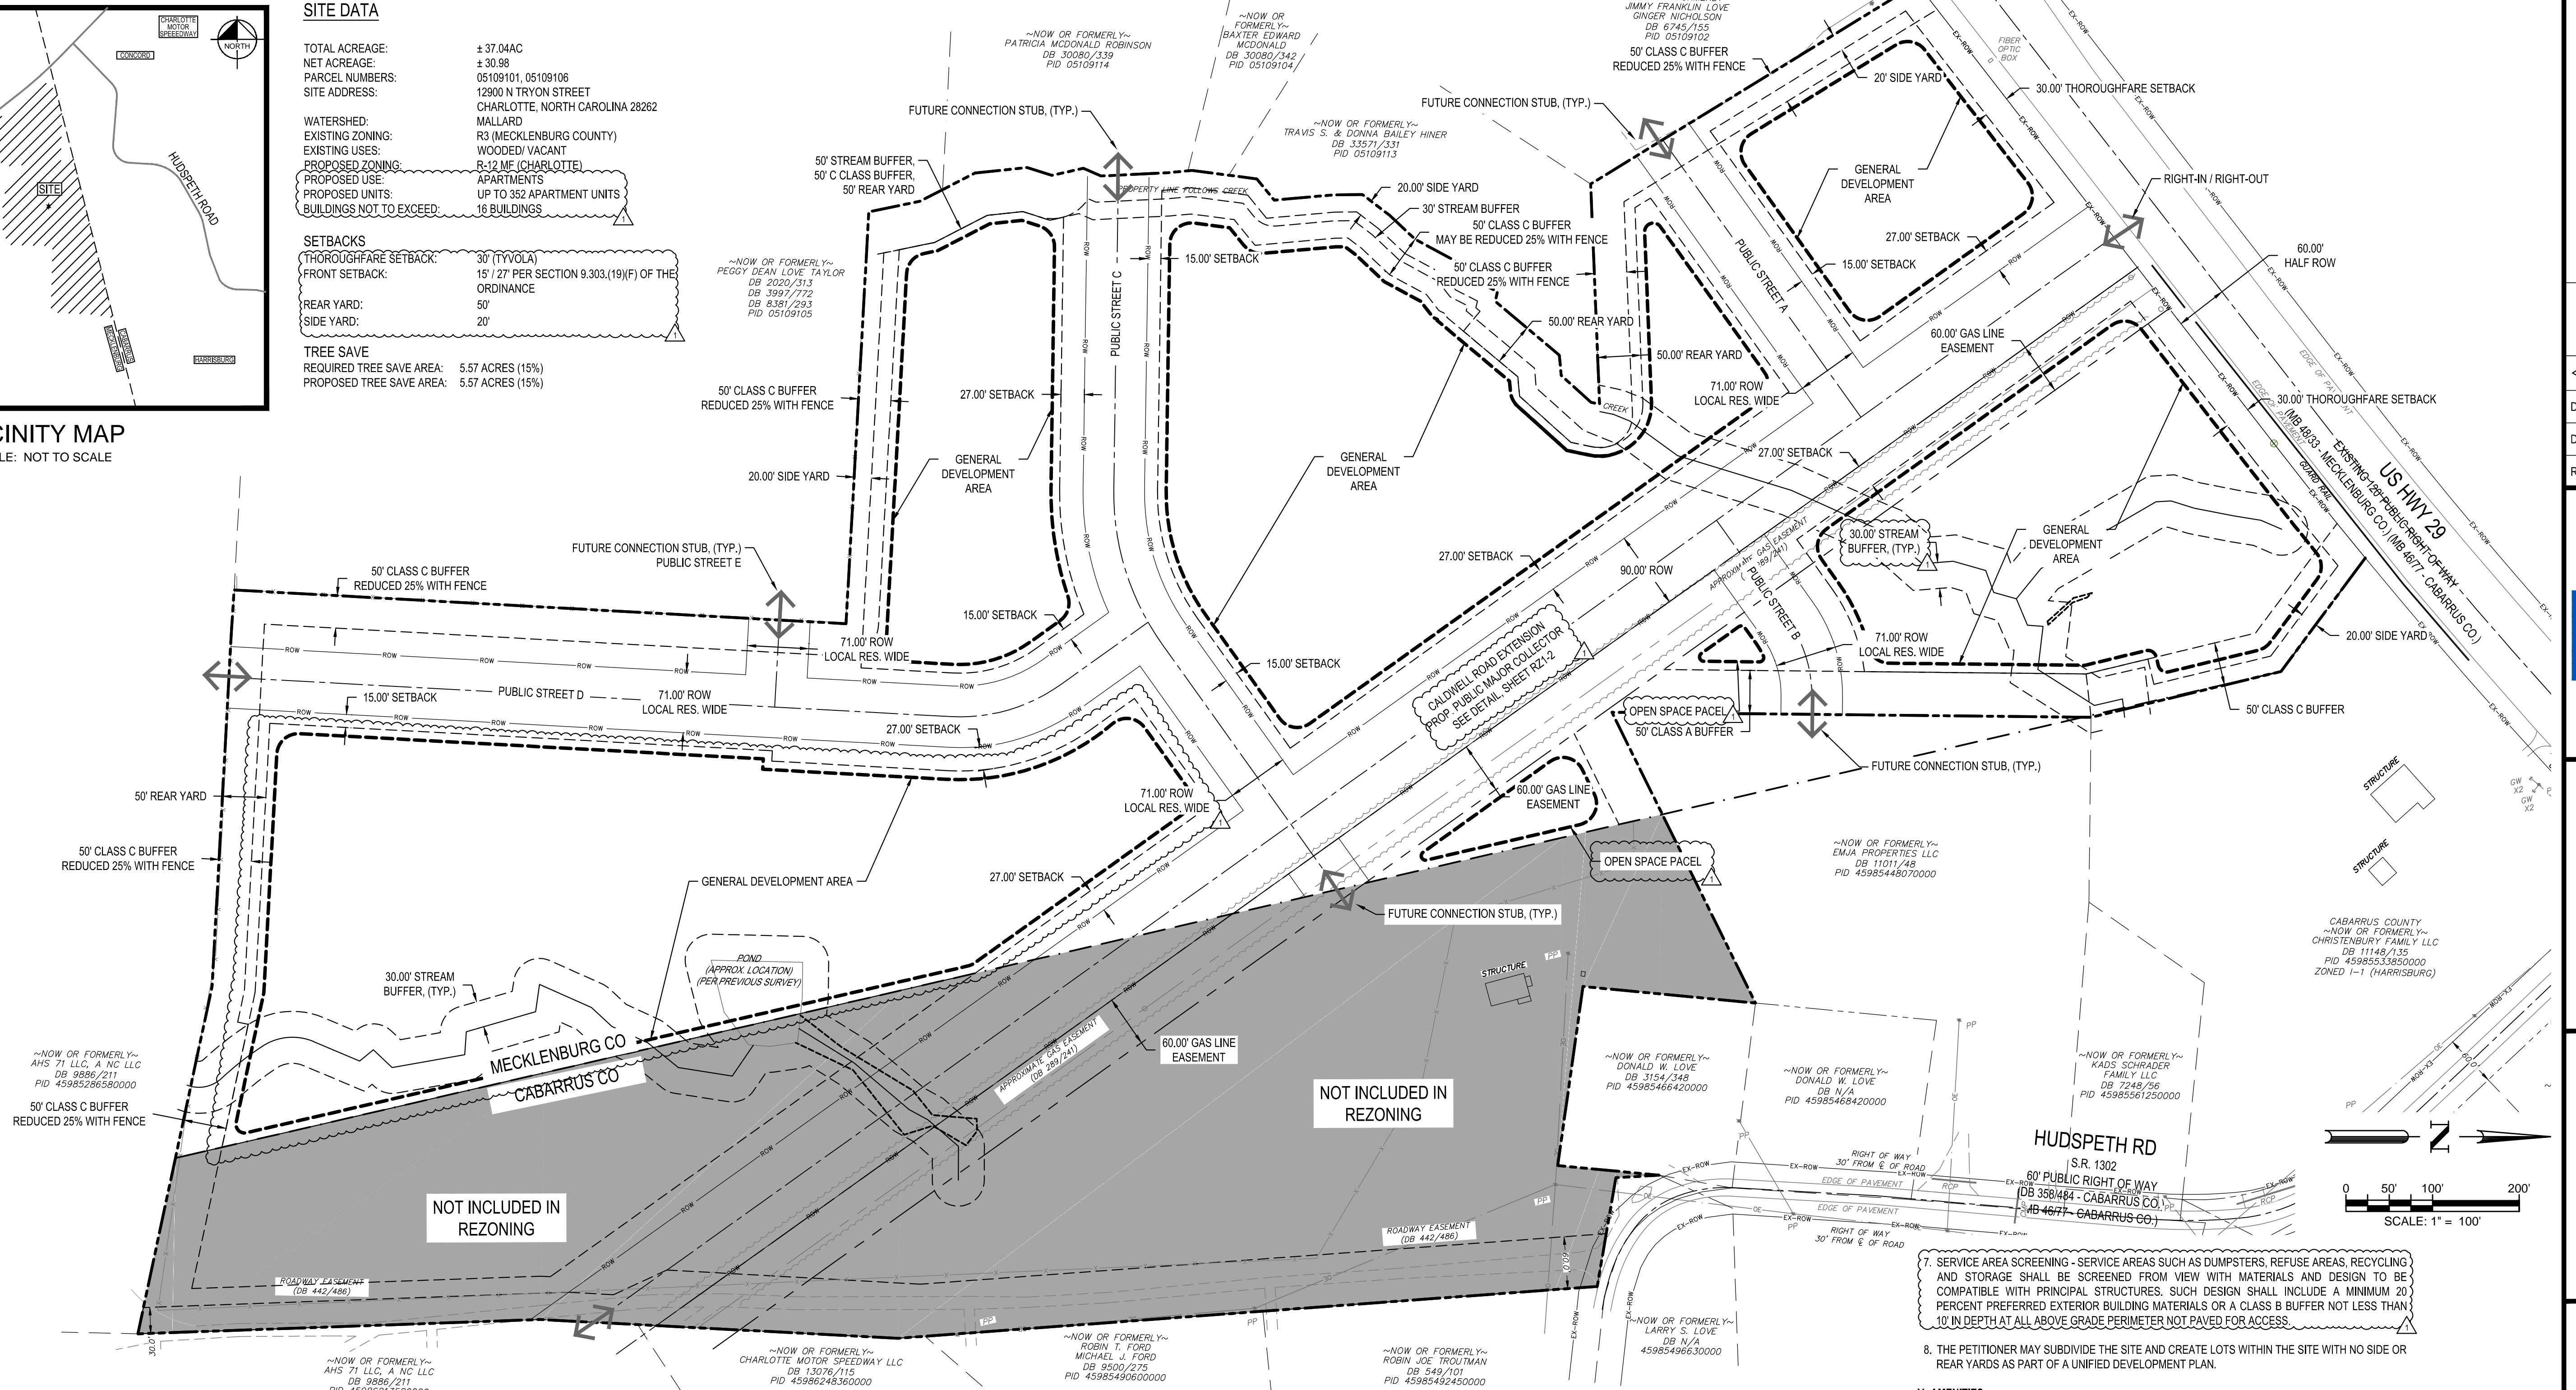

I. GENERAL PROVISIONS

1. THESE DEVELOPMENT STANDARDS FORM A PART OF THE REZONING PLAN ASSOCIATED WITH THE REZONING PETITION FILED BY TRIBUTE COMPANIES, INC. (THE "PETITIONER") TO ACCOMMODATE THE DEVELOPMENT OF A RESIDENTIAL COMMUNITY ON THAT APPROXIMATELY 37.14-ACRE SITE LOCATED NEAR THE SOUTHEAST INTERSECTION OF NORTH TRYON STREET AND HUDSPETH ROAD, MORE PARTICULARLY DEPICTED ON THE REZONING PLAN (THE "SITE"). THE SITE IS COMPRISED OF TAX PARCEL NUMBER 051-091-01 AND 051-091-06.
2. DEVELOPMENT OF THE SITE WILL BE GOVERNED BY THE REZONING PLAN, THESE DEVELOPMENT STANDARDS AND THE APPLICABLE PROVISIONS OF THE ZONING ORDINANCE (THE "ORDINANCE").
3. UNLESS THE REZONING PLAN OR THESE DEVELOPMENT STANDARDS ESTABLISH MORE STRINGENT STANDARDS, THE REGULATIONS ESTABLISHED UNDER THE ORDINANCE, REZONING FOR THE R-12MF ZONING DISTRICT SHALL GOVERN THE DEVELOPMENT AND USE OF THE SITE.
4. THE DEVELOPMENT AND STREET LAYOUT DEPICTED ON THE REZONING PLAN ARE SCHEMATIC IN NATURE AND ARE INTENDED TO DEPICT THE GENERAL ARRANGEMENT OF SUCH USES AND IMPROVEMENTS ON THE SITE. ACCORDINGLY, THE ULTIMATE LAYOUT, LOCATIONS AND SIZES OF THE DEVELOPMENT AND SITE ELEMENTS DEPICTED ON THE REZONING PLAN ARE GRAPHIC REPRESENTATIONS OF THE PROPOSED DEVELOPMENT AND SITE ELEMENTS, AND THEY MAY BE ALTERED OR MODIFIED IN ACCORDANCE WITH THE SETBACK, YARD, LANDSCAPING AND TREE SAVE REQUIREMENTS SET FORTH ON THIS PLAN AND THE DEVELOPMENT STANDARDS PROVIDED, HOWEVER, THAT ANY SUCH ALTERATIONS AND MODIFICATIONS SHALL BE MINOR IN NATURE AND NOT MATERIALLY CHANGE THE OVERALL DESIGN INTENT DEPICTED ON THE REZONING PLAN.
5. FUTURE AMENDMENTS TO THE REZONING PLAN AND/OR THESE DEVELOPMENT STANDARDS MAY BE APPLIED FOR BY THE THEN OWNER(S) OF THE SITE IN ACCORDANCE WITH THE PROVISIONS OF CHAPTER 6 OF THE ORDINANCE. MINOR ALTERATIONS TO THE REZONING PLAN ARE SUBJECT TO SECTION 6.207 OF THE ORDINANCE.

II. PERMITTED USES

THE SITE MAY BE DEVOTED ONLY TO A RESIDENTIAL COMMUNITY CONTAINING A MAXIMUM OF THREE HUNDRED AND FIFTY-TWO (352) MULTI-FAMILY RESIDENTIAL DWELING UNITS, AND ANY INCIDENTAL AND ACCESSORY USES RELATING THERETO THAT ARE PERMITTED IN THE R-12MF ZONING DISTRICT. THERE SHALL BE A MAXIMUM OF 16 PRIMARY BUILDINGS ON THE SITE (EXCLUDING ACCESSORY BUILDINGS SUCH AS MAINTENANCE BUILDINGS).

III. TRANSPORTATION & STREETScape

1. VEHICULAR ACCESS TO THE SITE SHALL BE AS GENERALLY DEPICTED ON THE REZONING PLAN. THE PLACEMENT AND CONFIGURATION OF THE VEHICULAR ACCESS POINTS ARE SUBJECT TO ANY MINOR MODIFICATIONS REQUIRED TO ACCOMMODATE FINAL SITE AND CONSTRUCTION PLANS AND DESIGNS AND AS REQUIRED FOR APPROVAL BY THE NORTH CAROLINA/CHARLOTTE DEPARTMENT OF TRANSPORTATION, AS APPLICABLE (NCDOT/CDDT).
2. AS DEPICTED ON THE REZONING PLAN, THE SITE WILL BE SERVED BY INTERNAL PUBLIC AND/OR PRIVATE STREETS, AND MINOR ADJUSTMENTS TO THE LOCATION OF THESE STREETS SHALL BE ALLOWED DURING THE CONSTRUCTION PERMITTING PROCESS IN COORDINATION WITH NCDOT/CDDT.
3. PETITIONER SHALL PROVIDE A MINIMUM OF EIGHT (8) FOOT WIDE PLANTING STRIP AND SIX (6) FOOT WIDE SIDEWALK ALONG ALL INTERNAL PUBLIC STREETS, WITH ACCESSIBLE CURB RAMPS PROVIDED AT EVERY INTERSECTION PER PROWAG AND ADA LAW.
4. PETITIONER SHALL DEDICATE ALL RIGHTS-OF-WAY WHERE NECESSARY, IN FEE SIMPLE CONVEYANCE TO NCDOT/CITY OF CHARLOTTE, AS APPLICABLE, PRIOR TO THE ISSUANCE OF THE SITE'S FIRST BUILDING CERTIFICATE OF OCCUPANCY.
5. THE PETITIONER SHALL ENSURE THAT ALL TRANSPORTATION IMPROVEMENTS ARE SUBSTANTIALLY COMPLETED PRIOR TO THE ISSUANCE OF THE SITE'S FIFTH (5TH) BUILDING CERTIFICATE OF OCCUPANCY.
6. ALL PUBLIC ROADWAY IMPROVEMENTS WILL BE SUBJECT TO THE STANDARDS AND CRITERIA OF CDOT AND NCDOT, AS APPLICABLE. TO THE ROADWAY IMPROVEMENTS WITHIN THEIR RESPECTIVE ROAD SYSTEM AUTHORITY, IT IS UNDERSTOOD THAT SUCH IMPROVEMENTS MAY BE UNDERTAKEN BY THE PETITIONER ON ITS OWN OR IN CONJUNCTION WITH OTHER DEVELOPMENT OR ROADWAY PROJECTS TAKING PLACE WITHIN THE BROAD NORTH EASTERN MECKLENBURG AREA, BY WAY OF A PRIVATE/PUBLIC PARTNERSHIP EFFORT OR OTHER PUBLIC SECTOR PROJECT SUPPORT.

IV. ARCHITECTURAL STANDARDS

1. PREFERRED EXTERIOR BUILDING MATERIALS: ALL PRINCIPAL AND ACCESSORY BUILDINGS ABUTTING A NETWORK REQUIRED PUBLIC OR PRIVATE STREET SHALL COMPRISE A MINIMUM OF 30% OF THAT BUILDING'S ENTIRE FAÇADE FACING SUCH NETWORK STREET USING BRICK, NATURAL STONE (OR ITS SYNTHETIC EQUIVALENT), HARDPLANK, STUCCO OR OTHER MATERIAL APPROVED BY THE PLANNING DIRECTOR.
2. PROHIBITED EXTERIOR BUILDING MATERIALS:
 - a. VINYL SIDING (BUT NOT VINYL HAND RAILS, WINDOWS OR DOOR TRIM); AND
 - b. CONCRETE MASONRY UNITS NOT ARCHITECTURALLY FINISHED.
3. BUILDING PLACEMENT AND SITE DESIGN SHALL FOCUS ON AND ENHANCE THE PEDESTRIAN ENVIRONMENT THROUGH THE FOLLOWING:
 - a. BUILDINGS SHALL BE PLACED SO AS TO PRESENT A FRONT OR SIDE FAÇADE TO ALL NETWORK REQUIRED STREETS (PUBLIC OR PRIVATE);
 - b. PARKING LOTS SHALL NOT BE LOCATED BETWEEN ANY BUILDING AND ANY NETWORK REQUIRED PUBLIC OR PRIVATE STREET; AND
 - c. DRIVEWAYS INTENDED TO SERVE SINGLE UNITS SHALL BE PROHIBITED ON ALL NETWORK REQUIRED STREETS.
4. BUILDING MASSING AND HEIGHT SHALL BE DESIGNED TO BREAK UP LONG MONOLITHIC BUILDING FORMS AS FOLLOWS: BUILDING SIDES GREATER THAN 120 FEET IN LENGTH SHALL INCLUDE MODULATIONS OF THE BUILDING MASSING/FAÇADE PLANE (SUCH AS RECESSES, PROJECTIONS, AND ARCHITECTURAL DETAILS). MODULATIONS SHALL BE A MINIMUM OF TEN (10) FEET WIDE AND SHALL PROJECT OR RECESS A MINIMUM OF SIX (6) FEET EXTENDING THROUGH THE BUILDING.

V. ARCHITECTURAL ELEVATION DESIGN - ELEVATIONS SHALL BE DESIGNED TO CREATE VISUAL INTEREST AS FOLLOWS:

- a. BUILDING ELEVATIONS SHALL BE DESIGNED WITH VERTICAL BAYS OR ARTICULATED ARCHITECTURAL FAÇADE FEATURES WHICH MAY INCLUDE BUT NOT BE LIMITED TO A COMBINATION OF EXTERIOR WALL OFFSETS, PROJECTIONS, RECESSES, PILASTERS, BANDING AND CHANGE IN MATERIALS OR COLORS.
 - b. BUILDINGS SHALL BE DESIGNED WITH A RECOGNIZABLE ARCHITECTURAL BASE ON ALL FAÇADES FACING NETWORK REQUIRED PUBLIC OR PRIVATE STREETS. SUCH BASE MAY BE EXECUTED THROUGH USE OF PREFERRED EXTERIOR BUILDING MATERIALS OR ARTICULATED ARCHITECTURAL FAÇADE FEATURES AND COLOR CHANGES.
 - c. BUILDING ELEVATIONS FACING NETWORK REQUIRED PUBLIC OR PRIVATE STREETS SHALL NOT HAVE EXPANSES OF BLANK WALLS GREATER THAN 20 FEET IN ALL DIRECTIONS AND ARCHITECTURAL FEATURES SUCH AS BUT TO LIMITED TO BANDING, MEDALLIONS OR DESIGN FEATURES OR MATERIALS WILL BE PROVIDED TO AVOID A STERILE, UNARTICULATED BLANK TREATMENT OF SUCH WALLS.
6. RESIDENTIAL ROOF FORM AND ARTICULATION - ROOF FORM AND LINES SHALL BE DESIGNED TO AVOID THE APPEARANCE OF A LARGE MONOLITHIC ROOF STRUCTURE AS FOLLOWS:
- a. LONG PITCHED OR FLAT ROOF LINES SHALL AVOID CONTINUOUS EXPANSES WITHOUT VARIATION BY INCLUDING CHANGES IN HEIGHT AND/OR ROOF FORM, TO INCLUDE BUT NOT BE LIMITED TO GABLES, HIPs DORMERS OR PARAPETS.
 - b. FOR PITCHED ROOFS THE MINIMUM ALLOWED IS 4:12 EXCLUDING BUILDINGS WITH A FLAT ROOF AND PARAPET WALLS.
 - c. ROOF TOP HVAC AND RELATED MECHANICAL EQUIPMENT WILL BE SCREENED FROM PUBLIC VIEW AT GRADE FROM THE NEAREST STREET.

7. SERVICE AREA SCREENING - SERVICE AREAS SUCH AS DUMPSTERS, REFUSE AREAS, RECYCLING AND STORAGE SHALL BE SCREENED FROM VIEW WITH MATERIALS AND DESIGN TO BE COMPATIBLE WITH PRINCIPAL STRUCTURES. SUCH DESIGN SHALL INCLUDE A MINIMUM 20 PERCENT PREFERRED EXTERIOR BUILDING MATERIALS OR A CLASS B BUFFER NOT LESS THAN 10' IN DEPTH AT ALL ABOVE GRADE PERIMETER NOT PAVED FOR ACCESS.
8. THE PETITIONER MAY SUBDIVIDE THE SITE AND CREATE LOTS WITHIN THE SITE WITH NO SIDE OR REAR YARDS AS PART OF A UNIFIED DEVELOPMENT PLAN.

V. AMENITIES

1. THE PETITIONER WILL PROVIDE A MINIMUM 0.5-ACRE AMENITY AREA, AS GENERALLY DEPICTED ON THE REZONING PLAN, TO INCLUDE A MINIMUM OF TWO (2) OF THE FOLLOWING AMENITIES: POOL, CLUBHOUSE, GRILLS, COMMUNITY GARDEN, SEATING AREA, GYM, CABANA, DOG PARK, PICNIC TABLES, BENCHES, AND/OR ENHANCED LANDSCAPING.

VI. ENVIRONMENTAL FEATURES

1. THE PETITIONER SHALL COMPLY WITH THE POST CONSTRUCTION STORMWATER ORDINANCE. THE LOCATION, SIZE, AND TYPE OF STORM WATER MANAGEMENT SYSTEMS DEPICTED ON THE REZONING PLAN ARE SUBJECT TO REVIEW AND APPROVAL AS PART OF THE FULL DEVELOPMENT PLAN SUBMITTAL AND ARE NOT IMPLICITLY APPROVED WITH THIS REZONING. ADJUSTMENTS MAY BE NECESSARY IN ORDER TO ACCOMMODATE ACTUAL STORM WATER TREATMENT REQUIREMENTS AND NATURAL SITE DISCHARGE POINTS.
2. THE PETITIONER SHALL COMPLY WITH THE TREE ORDINANCE.

VII. LIGHTING

1. ALL FREESTANDING LIGHTING FIXTURES INSTALLED ON THE SITE GREATER THAN TWENTY-ONE (21) FEET IN TOTAL HEIGHT (I.E., EXCLUDING DECORATIVE LIGHTING LESS THAN 21' IN HEIGHT THAT MAY BE INSTALLED ALONG THE DRIVEWAYS AND SIDEWALKS AS PEDESTRIAN/LANDSCAPING LIGHTING) SHALL BE FULLY CAPPED AND SHIELDED AND THE ILLUMINATION DOWNWARDLY DIRECTED.

VIII. BINDING EFFECT OF THE REZONING DOCUMENTS AND DEFINITIONS

IF THIS REZONING PETITION IS APPROVED, ALL CONDITIONS APPLICABLE TO DEVELOPMENT OF THE SITE IMPOSED UNDER THE REZONING PLAN AND THESE DEVELOPMENT STANDARDS WILL, UNLESS AMENDED IN THE MANNER PROVIDED UNDER THE ORDINANCE, BE BINDING UPON AND INURE TO THE BENEFIT OF THE PETITIONER AND SUBSEQUENT OWNERS OF THE SITE AND THEIR RESPECTIVE SUCCESSORS IN INTEREST AND ASSIGNS.

THROUGHOUT THESE DEVELOPMENT STANDARDS, THE TERMS, "PETITIONER" AND "OWNER" OR "OWNERS" SHALL BE DEEMED TO INCLUDE THE HEIRS, DEVISEES, PERSONAL REPRESENTATIVES, SUCCESSORS IN INTEREST AND ASSIGNS OF THE PETITIONER OR THE OWNER OR OWNERS OF ANY PART OF THE SITE FROM TIME TO TIME WHO MAY BE INVOLVED IN ANY FUTURE DEVELOPMENT THEREOF.

DESIGNED BY:	WSM	1ST REZONING SUBMITTAL COMMENTS	DESCRIPTION
DRAWN BY:	WSM	REV	DATE
REVIEWED BY:	AG	11/15/2021	

1111 METROPOLITAN AVE, SUITE 250
 CHARLOTTE, NC 28204
 www.bceinc.com
 NC LICENSE #C-4397

TRIBUTE COMPANIES, INC.
 10 S. CARDINAL DRIVE
 WILMINGTON, NC 28403

HUDSPETH
 12900 N TRYON STREET
 CHARLOTTE, NORTH CAROLINA 28262



REZONING PETITION #2021-150
 REZONING PLAN AND
 TECHNICAL DATA SHEET

NOT FOR CONSTRUCTION
 FILE NUMBER:
 8327-00
 DATE: 06/11/2021
 RZ 1-1



G:\NC\Projects\Tribute\TributeCompanies\8327-00 - Tribute Companies Hudspeth\03 - DWG\Plans\Sheets\Rezoning\2021-1108 - Hudspeth - Rezoning.dwg Layout: RZ 1-1 Plotted: 11/15/2021 1:45:39 PM

G:\NCA\Projects\Tribute Companies\8327-00 - Tribute Companies Hudspeth03 - DWG\Plans\Re zoning\2021-1108 - Hudspeth - Rezoning.dwg Layout: RZ-1-2 Plotted: 11/15/2021 1:45:19 PM

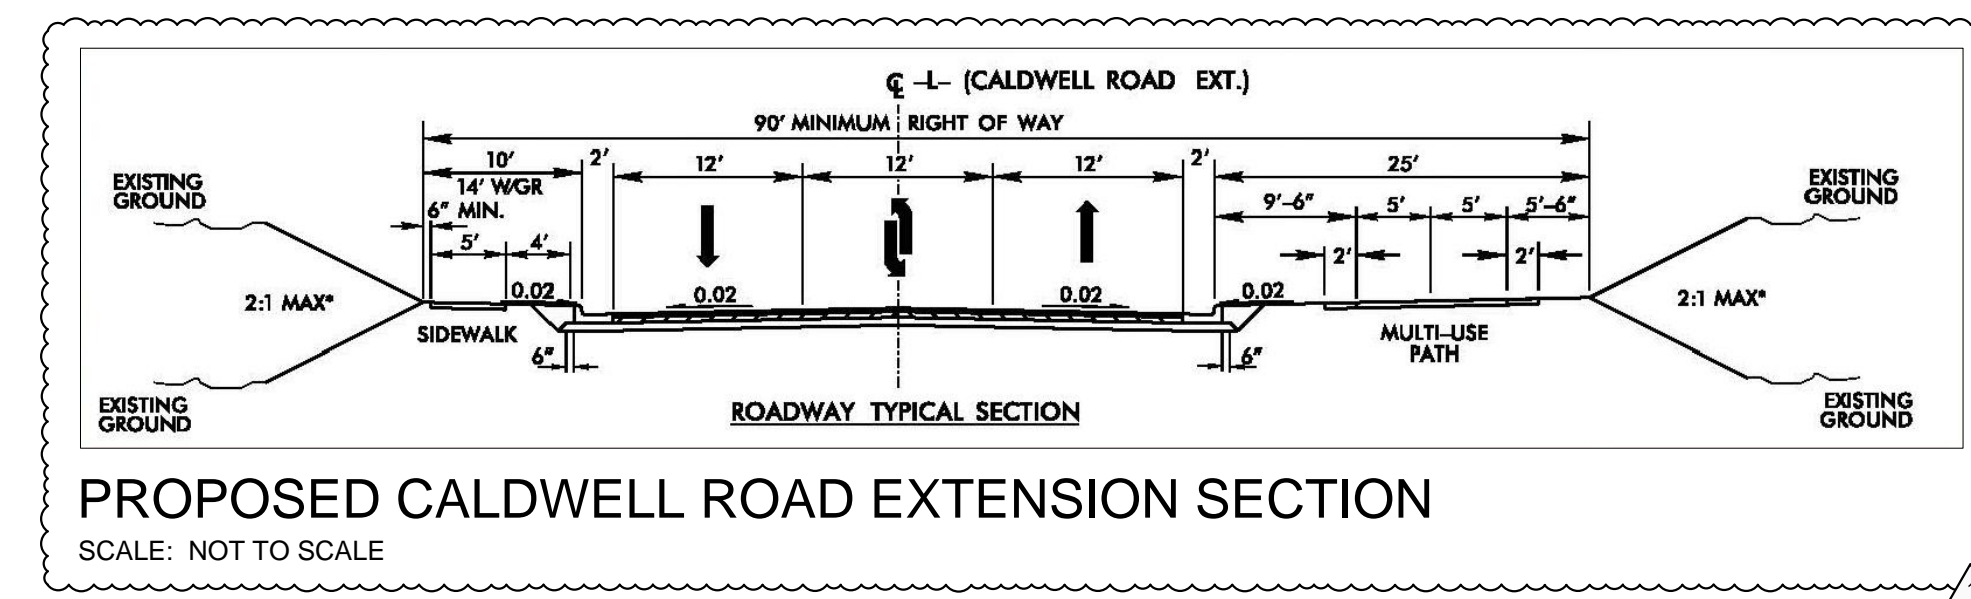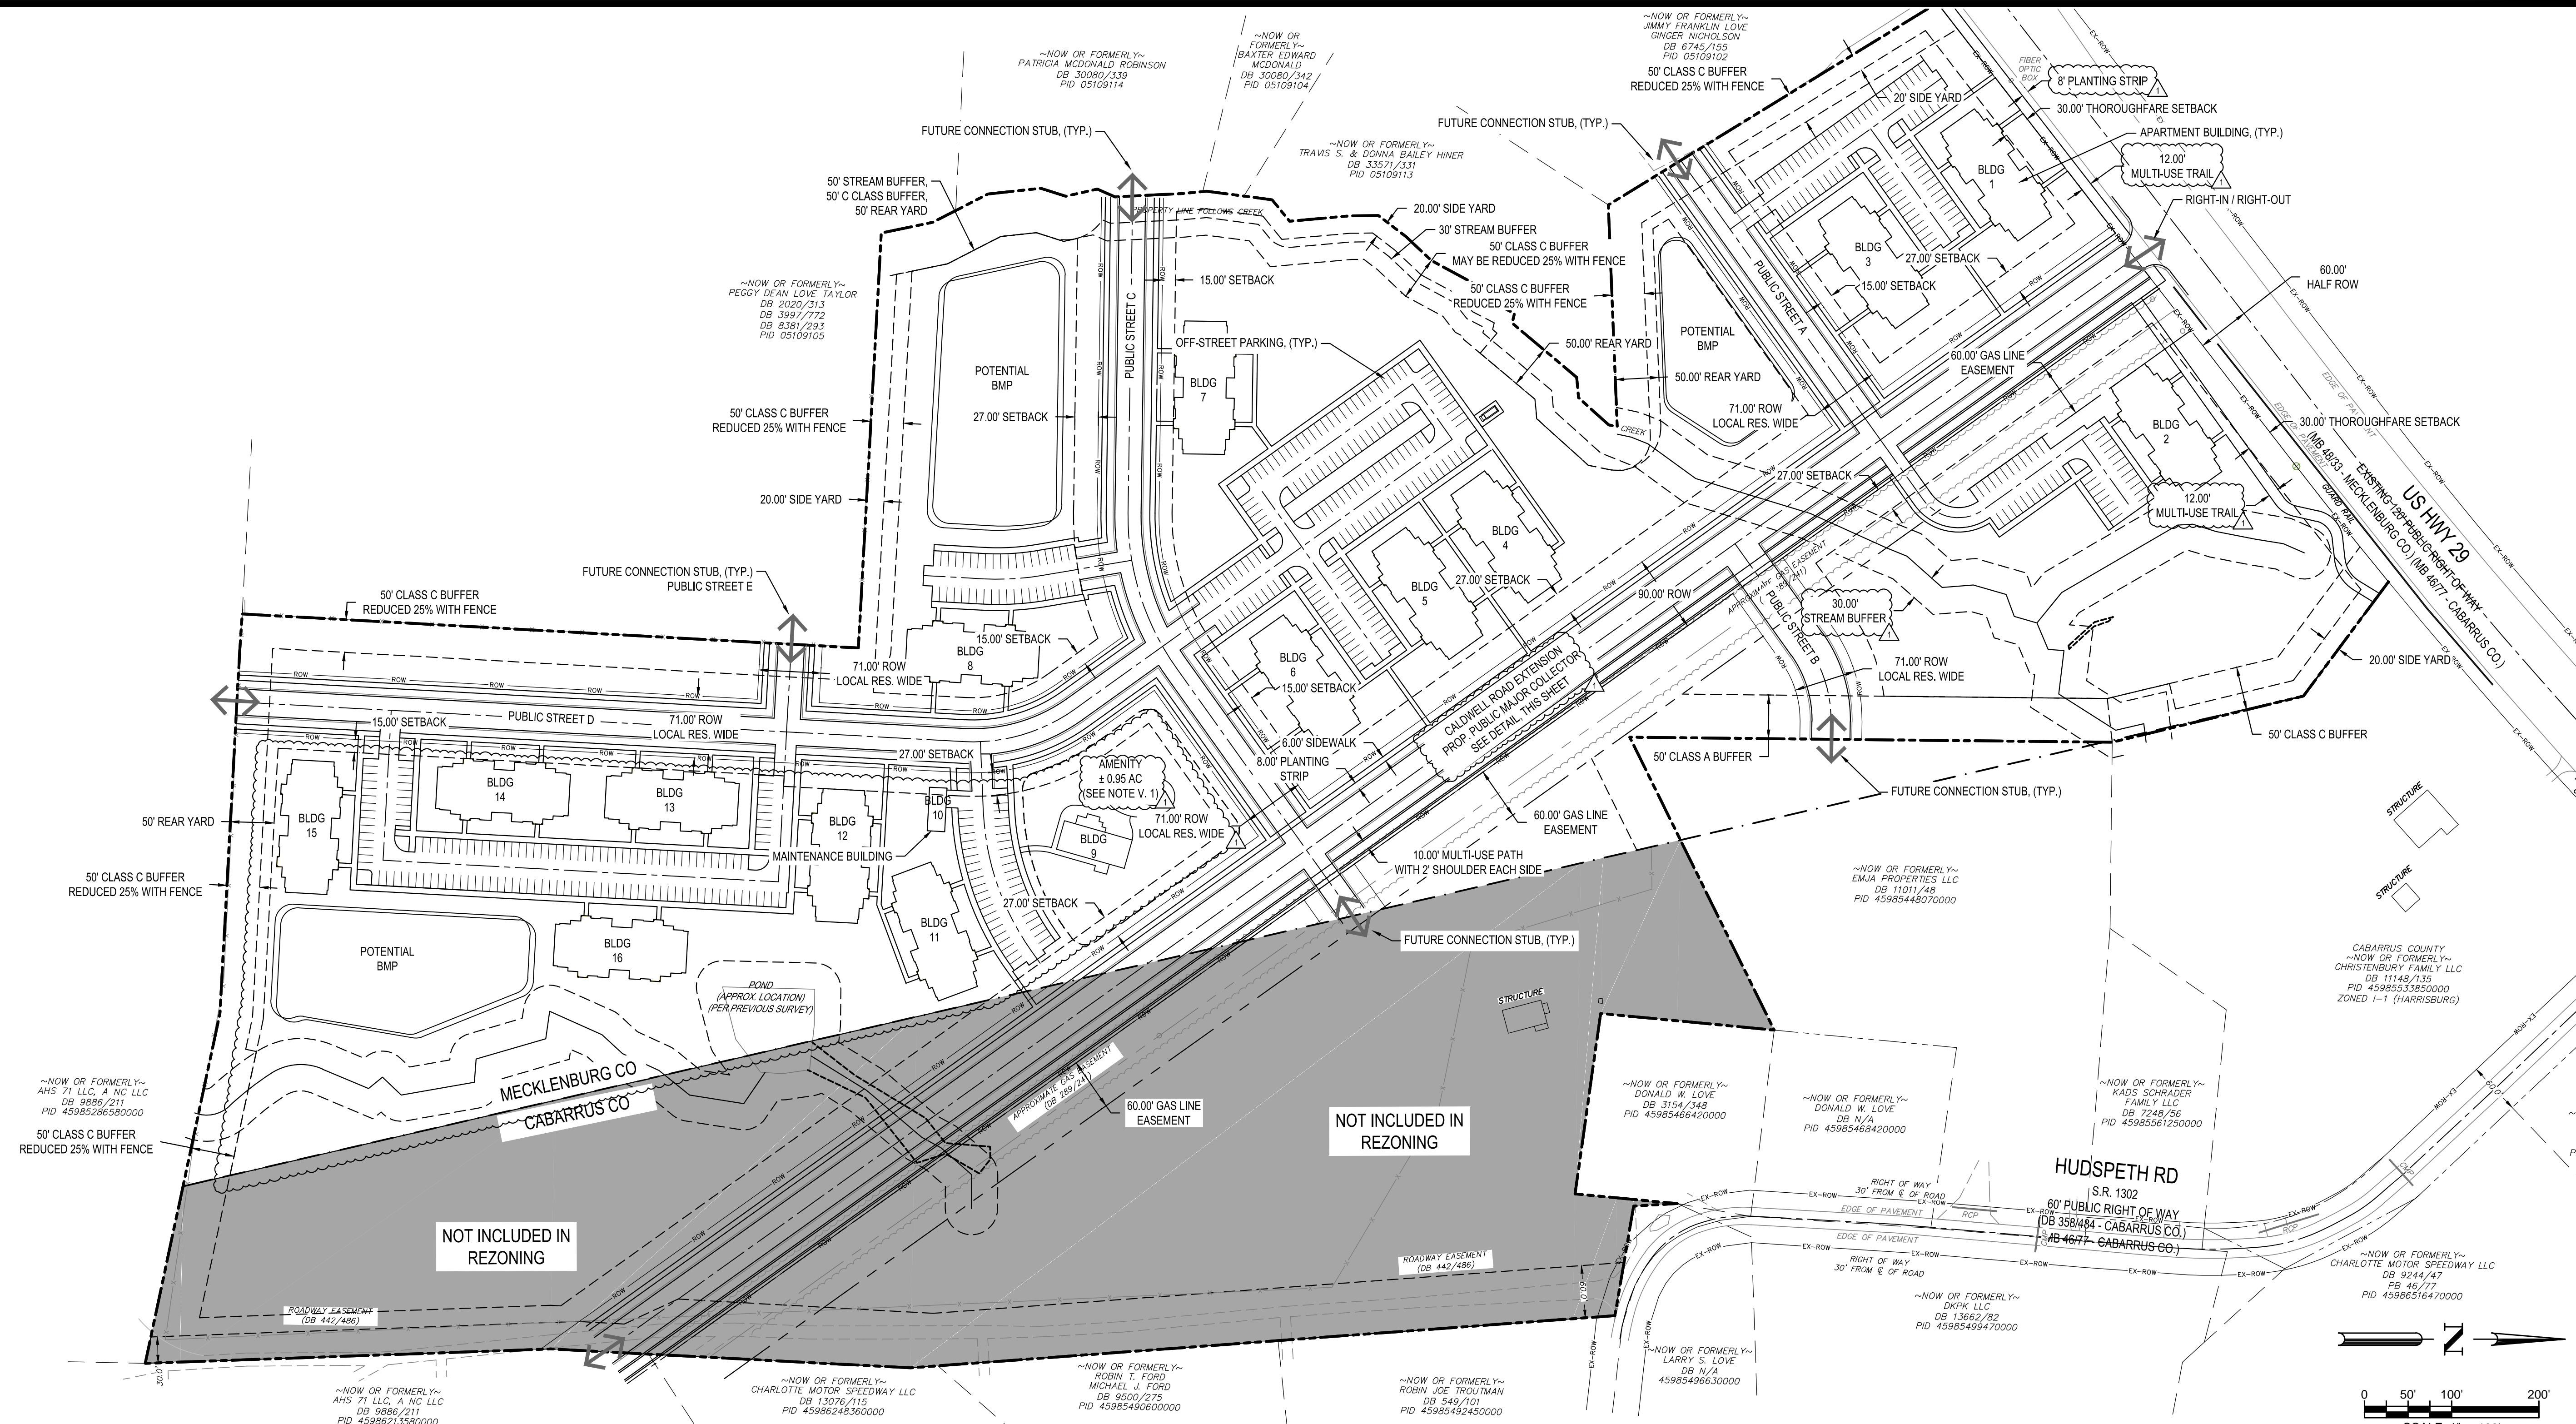

SITE DATA

TOTAL ACREAGE: ± 37.04AC
 NET ACREAGE: ± 30.98
 PARCEL NUMBERS: 05109101, 05109106
 SITE ADDRESS: 12900 N TRYON STREET, CHARLOTTE, NORTH CAROLINA 28262

WATERSHED: MALLARD
 EXISTING ZONING: R3 (MECKLENBURG COUNTY)
 EXISTING USES: WOODED/VACANT

PROPOSED ZONING: R-12 MF (CHARLOTTE)
 PROPOSED USE: APARTMENTS
 PROPOSED UNITS: UP TO 352 APARTMENT UNITS
 BUILDINGS NOT TO EXCEED: 16 BUILDINGS

SETBACKS

THOROUGHFARE SETBACK: 30' (TYVOLA)
 FRONT SETBACK: 15' / 27' PER SECTION 9.303,(19)(F) OF THE ORDINANCE
 REAR YARD: 50'
 SIDE YARD: 20'

TREE SAVE

REQUIRED TREE SAVE AREA: 5.57 ACRES (15%)
 PROPOSED TREE SAVE AREA: 5.57 ACRES (15%)

DESIGNED BY:	WSM
DRAWN BY:	WSM
REVIEWED BY:	AG

11/15/2021

1ST REZONING SUBMITTAL COMMENTS

DATE

REV

DESCRIPTION

BCE
 1111 METROPOLITAN AVE, SUITE 250
 CHARLOTTE, NC 28204
 www.bceinc.com
 NC LICENSE #C-4397

Tribute
 TRIBUTE COMPANIES, INC
 10 S. CARDINAL DRIVE
 WILMINGTON, NC 28403

HUDSPETH
 12900 N TRYON STREET
 CHARLOTTE, NORTH CAROLINA 28262

REZONING PETITION #2021-150
 SCHEMATIC SITE PLAN

NOT FOR CONSTRUCTION
 FILE NUMBER:
 8327-00
 DATE: 06/11/2021

RZ 1-2

811
 Know what's below.
 Call before you dig.