

# Rezoning Transportation Analysis

Petition Number: 2022-203

General Location Identifier: 22331503

**From: Jake Carpenter, PE**

Jacob.carpenter@charlottenc.gov

980-221-5675

**Reviewer:**

**Patrick Monroe**

Patrick.Monroe@charlottenc.gov

704-301-1411

## Revision Log:

Date	Description
4-27-23	First Review (PDM)
07-28-2023	Second Review (PDM)

## General Review Information

The petition is located adjacent to Lancaster Highway, a State-maintained major throughfare, and north of Danby Road, a State-maintained local street. The petition is located outside of Route 4.

Active Projects Near the Site:

- N/A

---

*CDOT's review of this rezoning petition is intended to provide consistency with council adopted policies, plans, standards and guidelines including, but not limited to, the [Transportation Action Plan \(TAP\)](#), [Vision Zero](#), [Urban Street Design Guidelines \(USDG\)](#), [Center, Corridor and Wedges](#), [Charlotte BIKES](#), [Traffic Impact Study Guidelines](#) and [Charlotte WALKS](#). With a commitment to design complete streets, this review is to ensure that the City's transportation network supports current and future land uses and includes streets that provide safe and comfortable mobility for motorists, pedestrians, bicyclists, and transit users.*

*This document is primarily for communication to Planning Department staff as part of the overall City staff analysis of the rezoning petition and includes an overall summary of the case from a transportation perspective, information on trip generation, and resolved or outstanding site plan concerns. Additional advisory information about the driveway permit process is provided for information only.*

---

Based on our review of the petition, we offer the following information for your consideration.

## Transportation Summary

The site is located adjacent to Lancaster Highway, a State-maintained major throughfare, and north of Danby Road, a State-maintained local street. A Traffic Impact Study (TIS) is not required for this site. CDOT has coordinated with the petitioner to provide a MUP and left turn lane on Lancaster Highway. Site plan revisions are needed to remove the left turn lane stop bar on Lancaster Highway. Further details are listed below.

# Rezoning Transportation Analysis

Petition Number: 2022-203

General Location Identifier: 22331503

## Trip Generation

Scenario	Land Use	Intensity	Trip Generation (vehicle trips/day)	Source
Existing Use	Single Family Detached	1 Dwelling Unit	10	<i>Tax Record</i>
Entitlement with Current Zoning	Single Family (R-3, 4.21 acres)	12 Dwelling Units	45	<i>General Guidance from Planning</i>
Proposed Zoning	Single Family Attached (R-8MF, 4.21 acres)	16 Dwelling Units	75	<i>Site Plan: 11-01-22</i>


Petitioner to provide responses to the staff comments below as well as specify other changes to the site plan.

## Outstanding Issues

**Strikethrough = Resolved**

### 1. ~~Curbline:~~

- a. ~~Lancaster Highway: Location of future curb and gutter to be installed to 30 feet from roadway centerline to accommodate the Charlotte Streets Map with a roadway typical section of four plus avenue with shared use path.~~

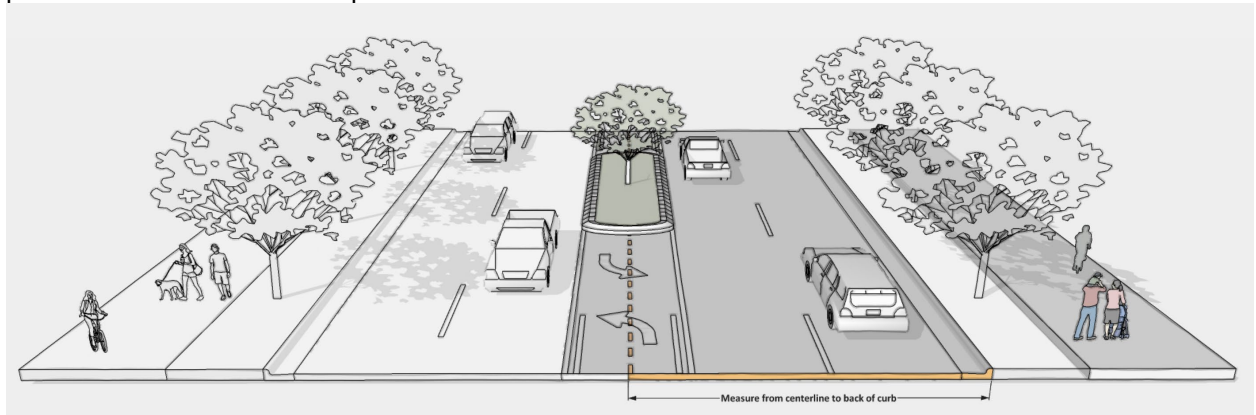

~~NOTE: Additional distance from center line to back of curb may be required in locations where a median is present or around intersections and interchanges.~~

~~Label and dimension the future curb and gutter from the centerline for each road on the site plan.~~

### 2. ~~Traffic Study:~~

~~A Traffic Impact Study (TIS) is not required for the complete review of this petition due to the site generating less than 2,500 daily trips and/or not triggering any other City TIS requirements.~~

3. ~~Per coordination with NCDOT, provide a left turn lane on Lancaster Highway at the proposed site access. A minimum of 50ft of storage should be provided.~~

4. ~~Revise site plan and conditional note(s) to commit to construct bicycle facilities by installing a 12' multi-use path to meet the Council-adopted Charlotte BIKES Policy. The MUP shall be located outside of the ROW.~~

# Rezoning Transportation Analysis

Petition Number: 2022-203

General Location Identifier: 22331503

5. ~~Add a conditional note specifying “the Petitioner shall dedicate and convey in fee simple all rights-of-way to the City before the site’s first building certificate of occupancy is issued. CDOT requests rights-of-way set at 2’ behind back of sidewalk where feasible.”~~
6. ~~Add conditional note specifying “All public roadway improvements will be subject to the standards and criteria of CDOT and NCDOT, as applicable, to the roadway improvements within their respective road system authority. It is understood that such improvements may be undertaken by the Petitioner on its own or in conjunction with other development or roadway projects taking place within the broad Mecklenburg area, by way of a private/public partnership effort or other public sector project support.”~~
7. ~~Revise site plan and conditional note(s) to construct a 12 ft multi use paths on Lancaster Highway outside of the right of way. The site plan shall label and dimension both items from the back of curb and gutter or edge of pavement. Add conditional note The entire facility must be outside of the right of way and within a public access easement. Add conditional note committing to construction and maintenance of the 12-foot sidewalks/multi use paths on Lancaster Highway.~~
8. **NEW COMMENT FROM 7.28.2023:** Remove stop bar shown at the proposed left turn lane.

## Advisory Information

The following are requirements of the developer that must be satisfied prior to driveway permit approval. These requirements shall be reflected on the rezoning plan, as appropriate.

1. CDOT has the authority to regulate/approve all private street/driveway and public street connections to the right-of-way of a street under the regulatory jurisdiction of the City of Charlotte, per the City of Charlotte's Driveway Regulations.
2. Adequate sight triangles must be reserved at the existing/proposed street entrance(s). Two 35' x 35' sight triangles (and two 10' x 70' sight triangles on NCDOT-maintained streets) are required for the entrance(s) to meet requirements. All proposed trees, berms, walls, fences, and/or identification signs shall not interfere with sight distance at the entrance(s) and shall be identified on the site plan.
3. The proposed driveway connection(s) to public streets will require a driveway permit(s) to be submitted to CDOT (and NCDOT on NCDOT-maintained streets) for review and approval. The exact driveway location(s) and type/width of the driveway(s) will be determined by CDOT during the driveway permit process. The locations of the driveway(s) shown on the site plan are subject to change in order to align with driveway(s) on the opposite side of the street and comply with City Driveway Regulations and the City Tree Ordinance.
4. All proposed commercial driveway connections to a future public street will require a driveway permit submitted to CDOT for review and approval.
5. Any fence or wall constructed along or adjacent to any sidewalk or street right-of-way requires a certificate issued by CDOT.
6. To obtain a street and pedestrian lighting recommendation, the petitioner should visit the following link: <https://charlottenc.gov/Transportation/Programs/Pages/StreetLighting.aspx>