



2/13/2023 5:07:46 PM

D
C
B
A

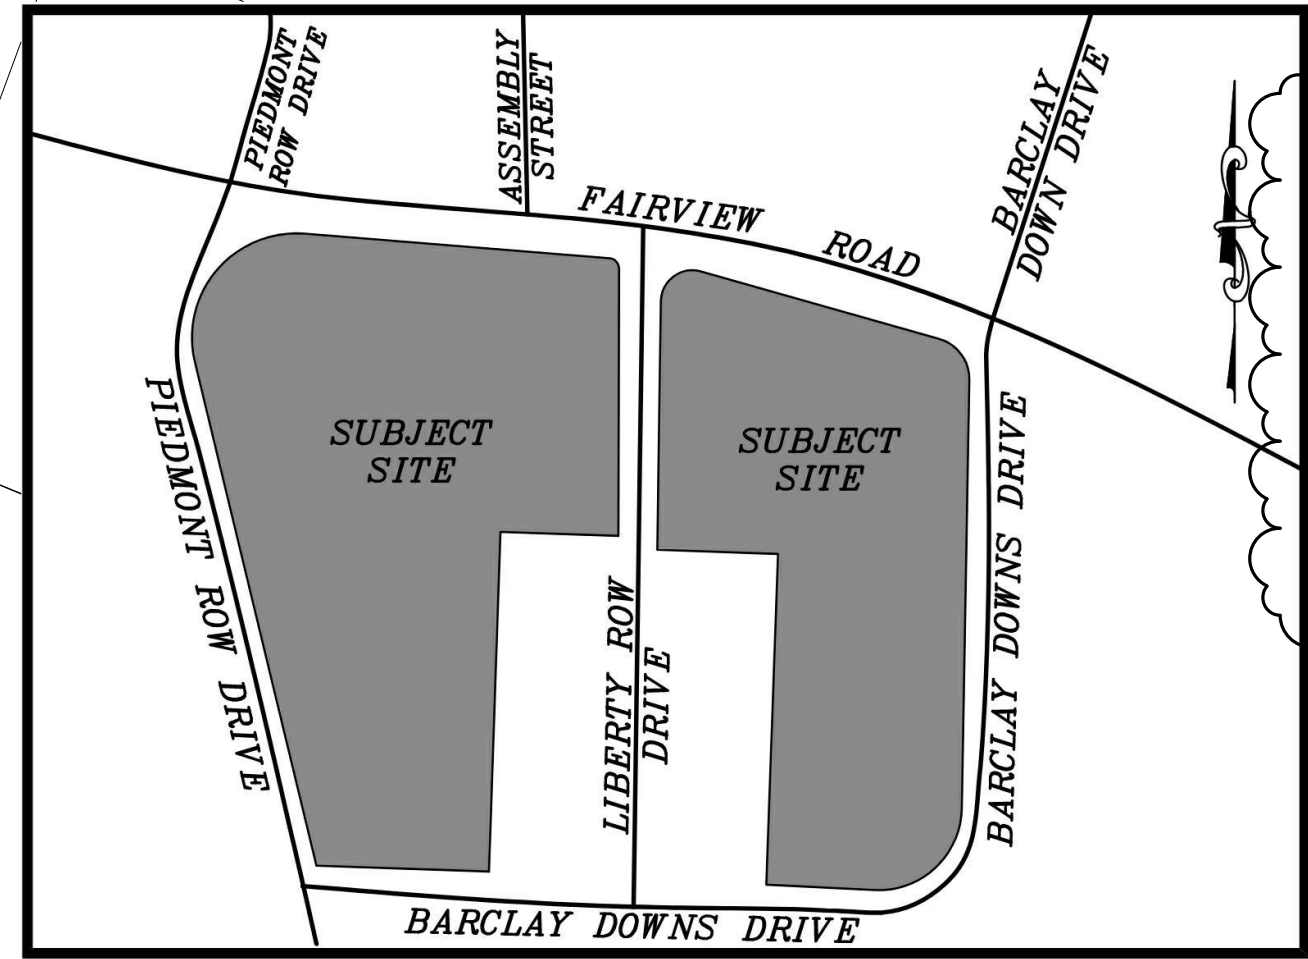

VICINITY MAP
SCALE: N.T.S.

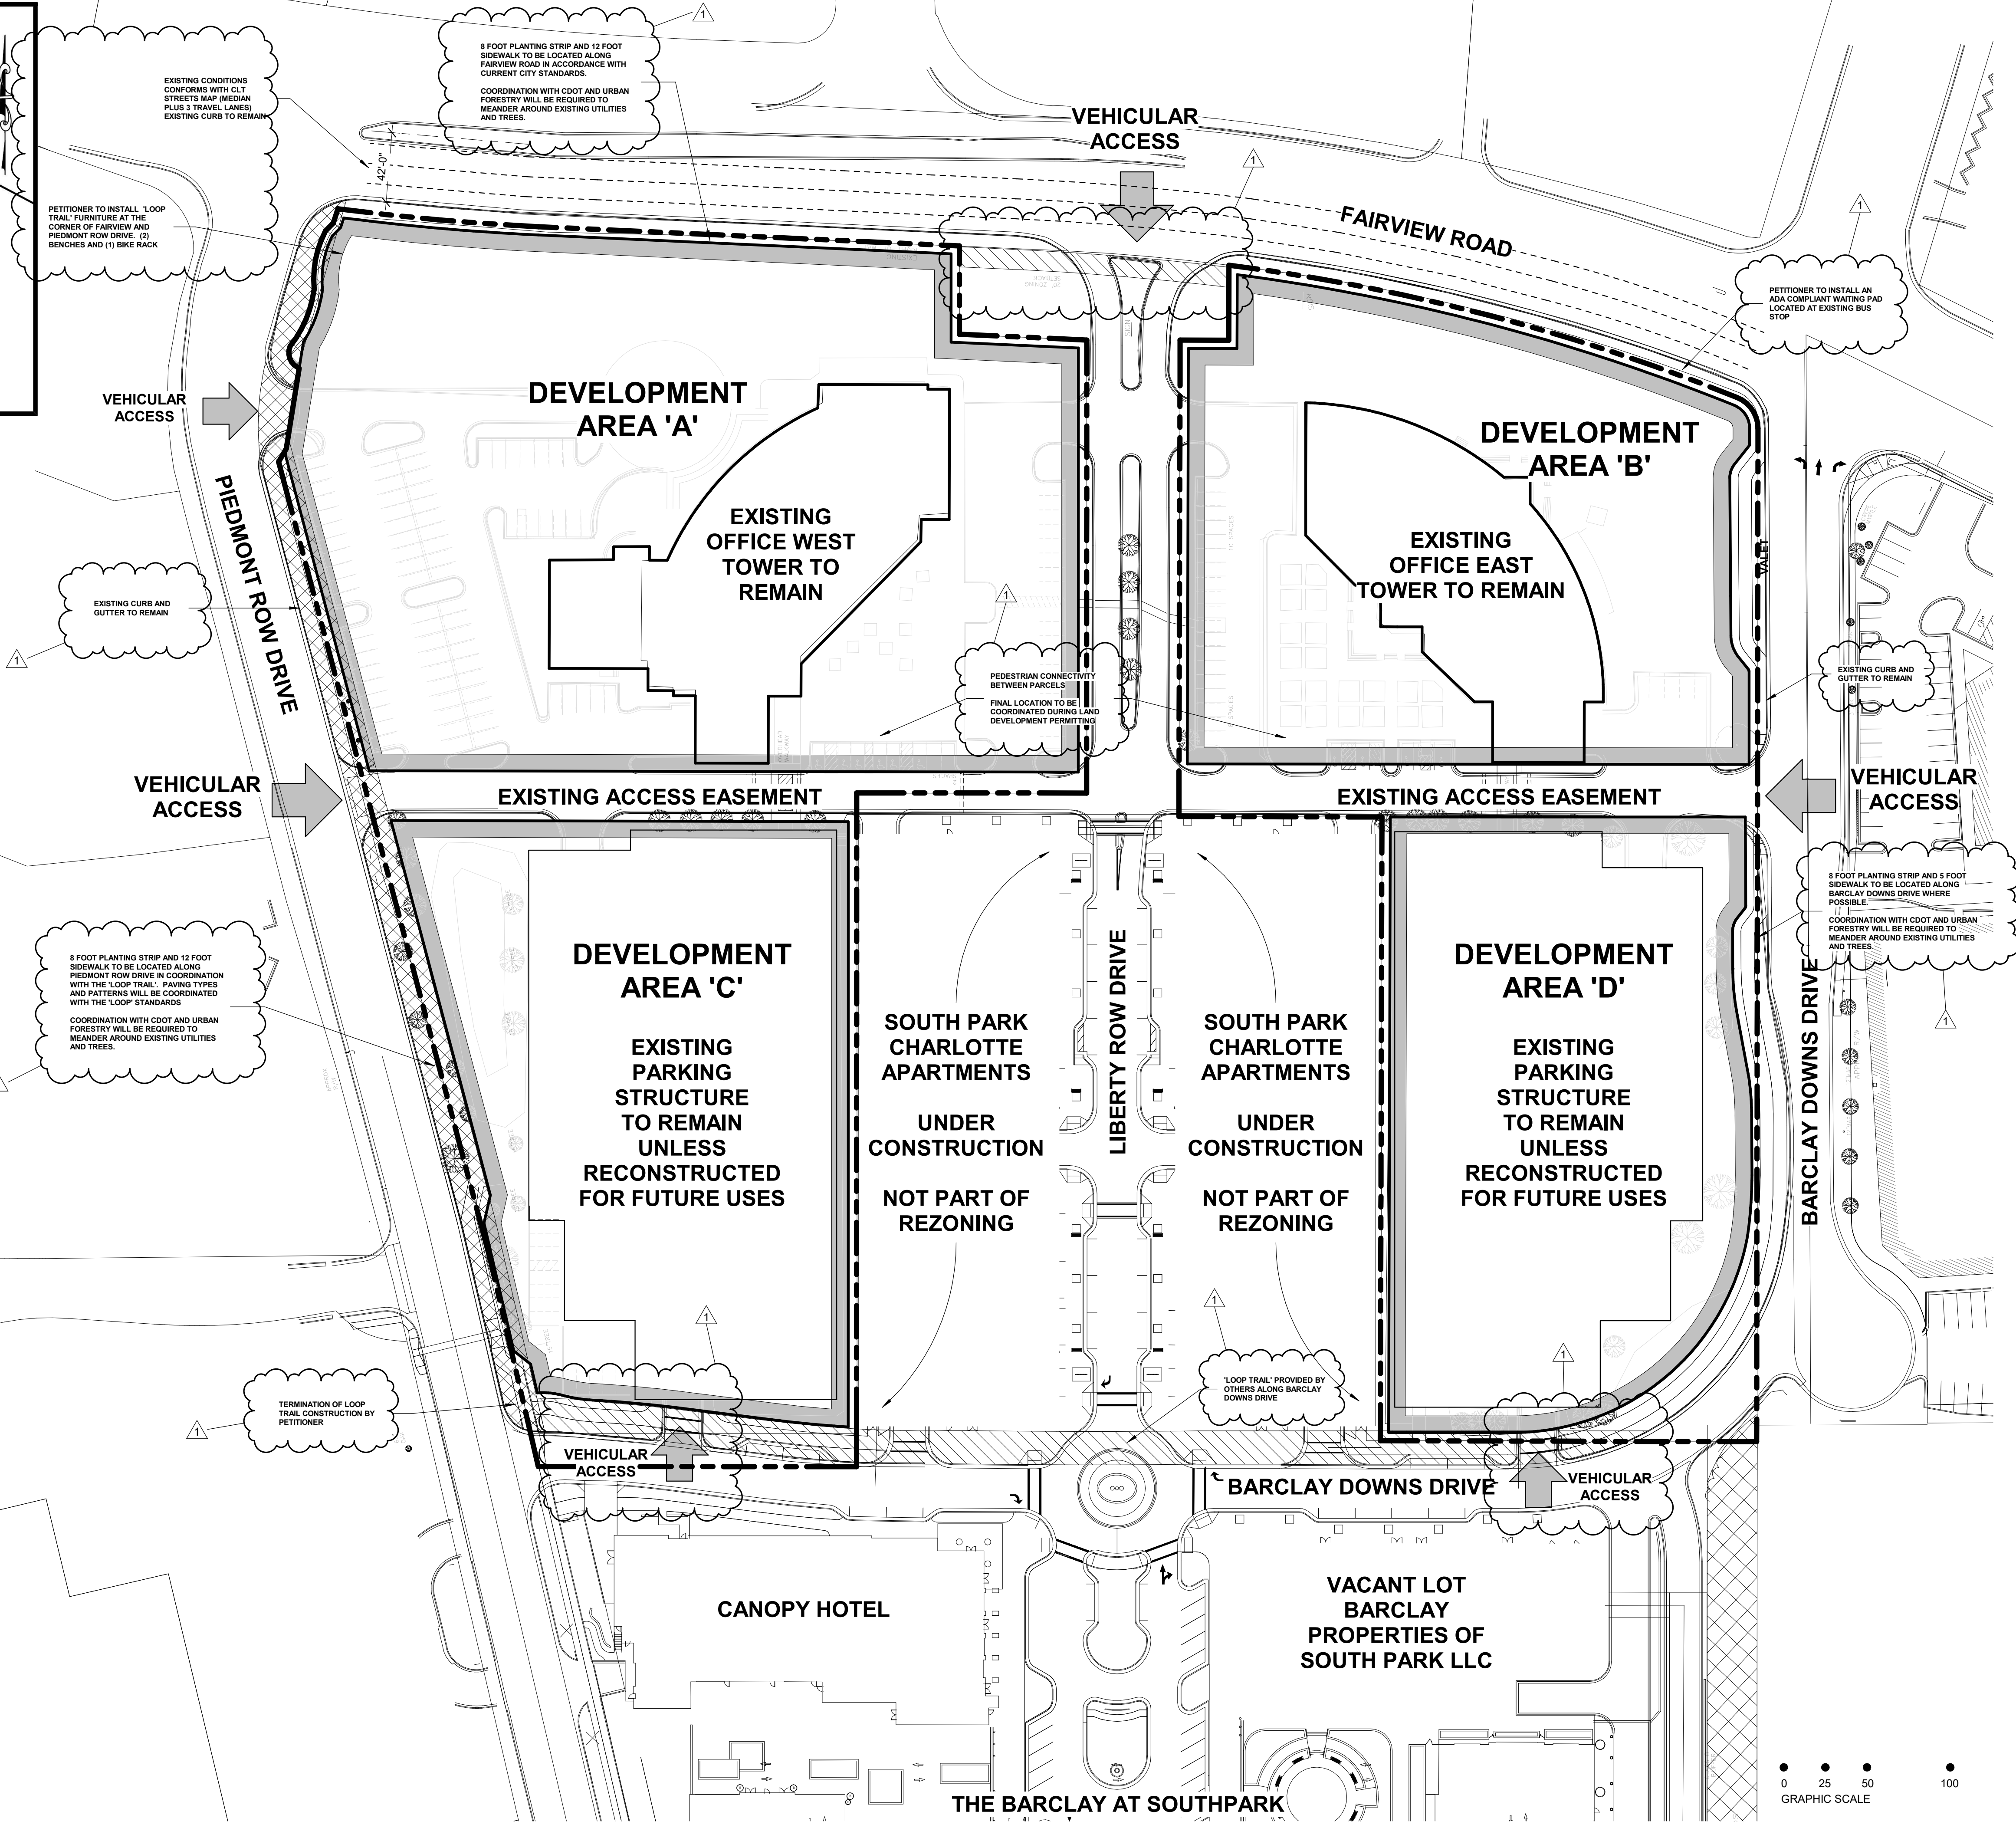

SouthPark Towers
PropCo, LLC

SOUTH PARK
TOWERS -
REZONING

LS3P

227 WEST TRADE STREET SUITE 700
CHARLOTTE, NORTH CAROLINA 28202
TEL. 704.333.6686 FAX 704.333.2926
WWW.LS3P.COM

MEMBERS OF THE AMERICAN INSTITUTE OF ARCHITECTS

COPYRIGHT 2018 ALL RIGHTS RESERVED
PRINTED OR ELECTRONIC DRAWINGS AND
DOCUMENTATION MAY NOT BE REPRODUCED
IN ANY FORM WITHOUT WRITTEN PERMISSION
FROM LS3P ASSOCIATES LTD.

REVISIONS:

No.	Description	Date
1	2nd Submittal	02/13/2023

PROJECT: Project Number
DATE: 7 FEB 2023
DRAWN BY: HS
CHECKED BY: JW

Technical Data
Sheet

RZ-100

0 25 50 100
GRAPHIC SCALE

REZONING PETITION #2022-147

DEVELOPMENT STANDARDS
Petitioner: SouthPark Towers PropCo, LLC
Rezoning Petition No. 2022-147
2/13/2023

Site Development Data:

- Acreage: ± 9.94
--Tax Parcels: 179-011-79 and 179-011-84
--Existing Zoning: O-3
--Proposed Zoning: MUDD-O
--Existing Uses: Commercial
--Proposed Uses: Uses permitted by right and under prescribed conditions together with accessory uses, as allowed in the MUDD zoning district not otherwise limited in the Rezoning Plan.
--Maximum Development:
a. Up to 300 multi-family dwelling units
b. 535,000 square feet of existing office uses;
c. 112,000 square feet of medical office (or up to 224 hotel rooms per the conversions below); and
d. Up to 38,000 square feet of retail, EDEE or personal service or other commercial uses (including 13,000 existing EDEE to remain).
--Maximum Building Height: 220 feet, per the Optional Provision in Section II
--Parking: As required by the Ordinance for the MUDD zoning district.

I. General Provisions:

- a. **Site Description.** These Development Standards and the Technical Data Sheet form the rezoning plan (hereafter collectively referred to as the "Rezoning Plan") associated with the Rezoning Petition filed by SouthPark Towers PropCo, LLC ("Petitioner") to accommodate development of a mixed-use building on an approximately 9.94-acre site located at 6000 and 6100 Fairview Road, more particularly described as Mecklenburg County Tax Parcel Numbers 179-011-79 and 179-011-84 (the "Site").
- b. **Intent.** This Rezoning is intended accommodate development on the Site of a pedestrian-focused mixture of MUDD-permitted uses including but not limited to multi-family residential, medical office, retail, hotel, and other commercial uses.
- c. **Zoning Districts/Ordinance.** Unless otherwise requested in the Optional Provisions, below, development of the Site will be governed by the Rezoning Plan as well as the applicable provisions of the City of Charlotte Zoning Ordinance (the "Ordinance").

II. Optional Provisions

1. The Petitioner requests the ability to exceed the height provisions in Section 9.8505(5) for a total of 220 feet of building height within the building envelope, measured per Ordinance standards.
2. The Petitioner requests the ability to allow existing parking and maneuvering to remain until such time as that area is redeveloped, in which case it must come into conformance with parking and maneuvering requirements under the MUDD Ordinance.
3. Existing parking structures, if they remain, shall not be subject to MUDD design standards to the extent they are legally noncomplying. However, if the parking structure(s) are demolished, all new construction shall meet MUDD standards.

III. Permitted Uses

Subject to the Maximum Development provisions set forth under Section IV below, the Site may be devoted to any non-residential uses permitted by right or under prescribed conditions in the MUDD Zoning District, together with any incidental or accessory uses associated therewith.

IV. Maximum Development and Restrictions

- a. Subject to the restrictions, limitations, and conversion rights listed below, the principal buildings constructed in Development Areas A, B, C, and D may be developed with up to (i) 112,000 square feet of gross floor area of medical office uses in Development Area A, (ii) 300 multi-family dwelling units in Development Areas C and/or D, and (iii) 25,000 square feet of retail, personal service, EDEE, and other non-residential uses permitted by right and under prescribed conditions in the MUDD zoning district, along with any accessory uses allowed in the MUDD zoning district.
- b. The site is developed with approximately 535,000 square feet of existing office uses and 13,000 square feet of EDEE uses to remain in existing buildings.
- c. **Prohibited Uses:** Car washes (except for residential car wash stations); Automobile Service Stations; EDEEs with accessory drive-through service windows; and climate controlled self-storage (except permitted accessory storage space for multi-family residential tenants).
- d. **Conversion Rights:**
1. Unused medical office space may be converted to lodging uses at a rate of 500 square feet to 1 room so converted within Development Area A.
2. Unused medical office space may be converted to retail at a rate of 1 square foot of medical office to 1 square foot of retail so converted, however the total amount of retail space converted shall not exceed 15,000 square feet. If unused medical office space is converted to lodging, then unused lodging space may be converted to retail at a rate of 1 room to 500 square feet of

retail so converted, however the total amount of retail space converted shall not exceed 15,000 square feet.

V. Transportation

- a. Vehicular access will be as generally depicted on the Rezoning Plan. The placements and configurations of the vehicular access points shown on the Rezoning Plan are subject to any minor modifications required to accommodate final site and construction plans and designs and to any adjustments required by CDOT for approval.
- b. Where necessary, the Petitioner shall dedicate and convey in fee simple all rights-of-way to the City of Charlotte before the Site's first building certificate of occupancy is issued.
- c. Unless otherwise stated herein, all transportation improvements shall be approved and constructed prior to the issuance of the Site's first building certificate of occupancy.
- d. Petitioner shall coordinate on installation of the SouthPark Loop along the Site's frontage of Piedmont Row Drive to the crosswalk, as generally depicted on the Rezoning Plan. The Loop shall consist of a minimum twelve (12) foot wide trail, which may meander, and eight (8) foot wide planting strip where feasible and not otherwise constrained by existing conditions, utilities, and/or mature trees.
1. Petitioner shall install two (2) benches and a bike rack at the terminus of the Loop, as generally depicted on the Rezoning Plan
- e. Petitioner shall provide a twelve (12) foot wide multi-use path and eight (8) foot wide planting strip along the Site's frontage of Fairview Road and a minimum eight (8) foot wide planting strip and five (5) foot wide sidewalk along the Site's frontage of Barclay Downs Drive, where feasible and not otherwise constrained by existing conditions, utilities, and/or mature trees, as generally depicted on the Rezoning Plan. Sidewalks may meander to preserve existing conditions.
- f. A Right-of-Way Encroachment Agreement is required for the installation of any non-standard item(s) (irrigation systems, decorative concrete pavement, brick pavers, etc.) within a proposed/existing City-maintained street right-of-way by a private individual, group, business, or homeowner's/business association. An encroachment agreement must be approved by CDOT prior to construction/installation. Contact CDOT for additional information concerning cost, submittal, and liability insurance coverage requirements.
- g. Petitioner shall construct a new ADA-compliant CATS bus waiting pad per Land Development Standard 60.03A at the current bus stop location.

VI. Design Guidelines:

- a. The two (2) existing office buildings shall remain, as generally depicted on the Rezoning Plan and are exempt from Section VIb. If either/both of the existing parking deck(s) remain, they shall each also be exempt from the new construction guidelines of Section VIb. for the portion(s) remaining.
- b. **General Design Guidelines for New Construction.**
1. The principal buildings constructed on the Site may use a variety of building materials. The building materials used for buildings will be a combination of any of the following: glass, brick, metal, stone, simulated stone, pre-cast stone, architectural precast concrete, synthetic stone, stucco/E.I.F.S., cementitious siding (such as hardi-plank), or wood/composite wood. Vinyl, as a building material, will only be allowed on windows, soffits and trim features
2. New facades fronting public streets shall meet all MUDD activation standards.
3. If structured parking is developed, exposed multi-level parking decks shall provide screening so that the view of interior lighting and cars is obscured from required public or private streets through the use of decorative louvers, architectural panels, metal and/or precast concrete barrier walls, including screening of vehicles from adjacent properties with a minimum 3.5-foot screening wall or other comparable screening measures.
4. Meter banks shall be located outside of the setback.
5. All dumpster enclosure areas shall be internal to the building/parking deck or screened from network required public or private streets with materials complimentary to the principal structure.

VII. Open Space

The Petitioner shall provide double (2x) the required amount of open space for new buildings over 50,000 square feet on the Site as otherwise required by the MUDD Ordinance. Provided open space may be phased with the completion of each new construction building over 50,000 square feet. Calculations of required open space area(s) for new construction under this Rezoning Plan may include newly developed open space and/or existing open space area(s) on the Site.

VIII. Environmental Features

- a. The Petitioner shall comply with the Post Construction Stormwater Ordinance.
- b. The Petitioner shall comply with the Tree Ordinance.

IX. Signage

Shall comply with Ordinance standards for the MUDD Zoning District.

X.

Lighting:

All necessary lighting shall be full cut-off type lighting fixtures. Decorative lighting may be installed on buildings for pedestrian and vehicular circulation along the driveways, sidewalks, and parking areas. Exterior accent/architectural lighting shall be permitted.

XI.

Amendments to the Rezoning Plan:

Future amendments to the Rezoning Plan may be applied for by the then Owner or Owners of the applicable Lot of the Site affected by such amendment in accordance with the provisions herein and of Section 6.207 of the Ordinance.

XII.

Binding Effect of the Rezoning Application:

If this Rezoning Petition is approved, all conditions applicable to the development of the Site imposed under the Rezoning Plan will, unless amended in the manner provided herein and under the Ordinance, be binding upon and inure to the benefit of the Petitioner and subsequent owners of the Site or Lot(s), as applicable, and their respective heirs, devisees, personal representatives, successors in interest or assigns.

SouthPark Towers
PropCo, LLC

SOUTH PARK
TOWERS -
REZONING

LS3P

227 WEST TRADE STREET SUITE 700
CHARLOTTE, NORTH CAROLINA 28202
TEL. 704.333.6686 FAX 704.333.2926
WWW.LS3P.COM

MEMBERS OF THE AMERICAN INSTITUTE OF ARCHITECTS
COPYRIGHT 2018 ALL RIGHTS RESERVED
PRINTED OR ELECTRONIC DRAWINGS AND
DOCUMENTATION MAY NOT BE REPRODUCED
IN ANY FORM WITHOUT WRITTEN PERMISSION
FROM LS3P ASSOCIATES LTD.

REVISIONS:

No.	Description	Date
1	2nd Submittal	02/13/2023

PROJECT: Project Number
DATE: 7 FEB 2023
DRAWN BY: HS
CHECKED BY: JW

DEVELOPMENT
STANDARDS

RZ-101