

Rezoning Transportation Analysis

Petition Number: 2025-117

General Location Identifier: 03119110, 03119129, 03119109, 03119117, 03119108

From: Jake Carpenter, PE

Jacob.Carpenter@charlottenc.gov

980-221-5675

Reviewer:

Isaiah Washington

Isaiah.Washington@charlottenc.gov

980-275-2494

Revision Log:

Date	Description
11-25-25	First Review (KC)

General Review Information

The petition is located at the intersection of Hart Road, a State-maintained major collector, and Rozzelles Ferry Road, a State-maintained minor arterial. The petition is located in a northwest wedge outside of Route 4, within the Westside Strategy Plan Study Area.

Active Projects Near the Site:

- There are no known transportation projects in the vicinity.

CDOT's review of this rezoning petition is intended to provide consistency with council adopted policies, plans, standards and guidelines including, but not limited to, the [Transportation Action Plan \(TAP\)](#), [Vision Zero](#), [Urban Street Design Guidelines \(USDG\)](#), [Center, Corridor and Wedges](#), [Charlotte BIKES](#), [Traffic Impact Study Guidelines](#) and [Charlotte WALKS](#). With a commitment to design complete streets, this review is to ensure that the City's transportation network supports current and future land uses and includes streets that provide safe and comfortable mobility for motorists, pedestrians, bicyclists, and transit users.

This document is primarily for communication to Planning Department staff as part of the overall City staff analysis of the rezoning petition and includes an overall summary of the case from a transportation perspective, information on trip generation, and resolved or outstanding site plan concerns. Additional advisory information about the driveway permit process is provided for information only.

Based on our review of the petition, we offer the following information for your consideration.

Transportation Summary

The site is located at the intersection of Hart Road, a State-maintained major collector, and Rozzelles Ferry Road, a State-maintained minor arterial. A Traffic Impact Study (TIS) is not required for the site due to the development generating site trips under ordinance thresholds and not meeting additional TIS triggers. Site plan and/or conditional note revisions are needed to commit to constructing 12' shared use path along Rozelles Ferry Road, Change end of road designs internal to the site and conditional note revision in accordance with the UDO. Further details are listed below.

Rezoning Transportation Analysis

Petition Number: 2025-117

General Location Identifier: 03119110, 03119129, 03119109, 03119117, 03119108

Trip Generation

Scenario	Land Use	Intensity	Trip Generation			Source
			Daily Trips	AM Peak Hour Trips	PM Peak Hour Trips	
Existing Use	Residential	5 DU	64	5	6	<i>Tax Record</i>
Entitlement with Current Zoning	Residential (N1-A, B-2 12.68 acres)	38 DU	414	31	40	<i>General Guidance from Planning</i>
Proposed Zoning	Residential (N2-A, 12.68 acres)	130 DU	940	62	74	<i>Site Plan: 10-13-2025</i>

Petitioner to provide responses to the staff comments below as well as specify other changes to the site plan.


Outstanding Issues

Strikethrough = Resolved

1. Curblines:

- a. **Rozelles Ferry Road:** Location of future curb and gutter is to be located 19' from centerline. Curb and gutter is not required to be constructed in coordination with NCDOT.

2+ Avenue, Shared Use Path

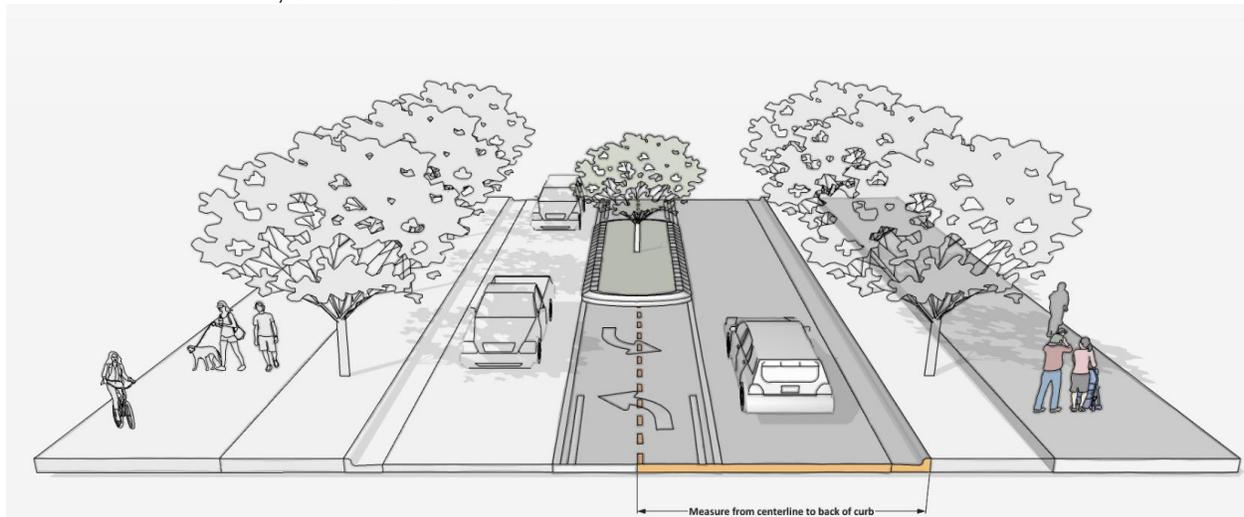


Label and dimension the curb and gutter from the centerline for each road on the site plan. Revise site plan and conditional note(s) to commit to labeling future curb and gutter along Rozelles Ferry Road only for reference. Infrastructure is to be placed according to the future back of curb location.

Rezoning Transportation Analysis

Petition Number: 2025-117

General Location Identifier: 03119110, 03119129, 03119109, 03119117, 03119108

- b. **Hart Road:** Location of future curb and gutter is to be located 17.5' from centerline.

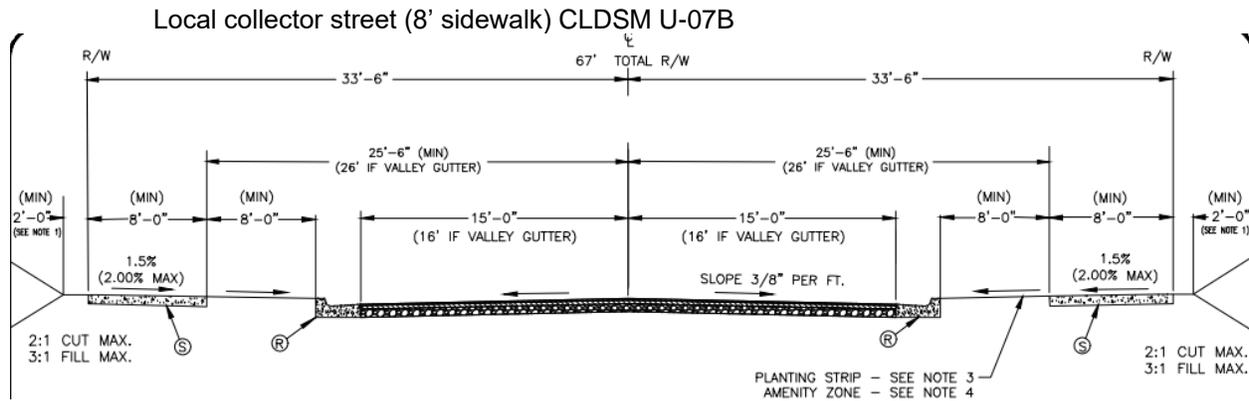

Label and dimension the curb and gutter from the centerline for each road on the site plan.

2. Comprehensive Transportation Review (CTR):

A Traffic Impact Study (TIS) is not required for the complete review of this petition due to the site generating site trips under ordinance thresholds found in the Charlotte Streets manual Table 3.1 and/or not triggering any other City TIS requirements.

The petition's zoning falls within the low development which based on the 940 daily trips will trigger Tier 1 (3 mitigation points) for multimodal assessment. The petitioner shall review and assess the publicly accessible pedestrian network within ¼ mile walking distance of the site to identify multimodal infrastructure to meet the Tier 1 (3 mitigation points) for multimodal assessment.


3. Revise site plan and conditional note(s) to commit to dedicate 33.5' right-of-way from the road centerline along Hart Road. The site plan shall label and dimension the right-of-way from the road centerline.
4. ~~Revise site plan and conditional note(s) to commit to construct bicycle facilities by a 12' multi-use path along Rozelles Ferry Road in accordance with the council-adopted Charlotte Streets Map. Multi-use paths maintained by the City shall meet ADA/PROWAG requirements.~~
5. ~~Add a conditional note specifying "A Right-of-Way Encroachment Agreement is required for the installation of any non-standard item(s) (irrigation systems, decorative concrete pavement, brick pavers, etc.) within a proposed/existing City maintained street right of way by a private individual, group, business, or homeowner's/business association. An encroachment agreement must be approved by CDOT prior to construction/installation. Contact CDOT for additional information concerning cost, submittal, and liability insurance coverage requirements."~~

Rezoning Transportation Analysis


Petition Number: 2025-117

General Location Identifier: 03119110, 03119129, 03119109, 03119117, 03119108

6. Revise site plan and conditional note(s) to commit to constructing the private alleys as driveway connections to a hammerhead instead of this cul-de-sac intersection design.

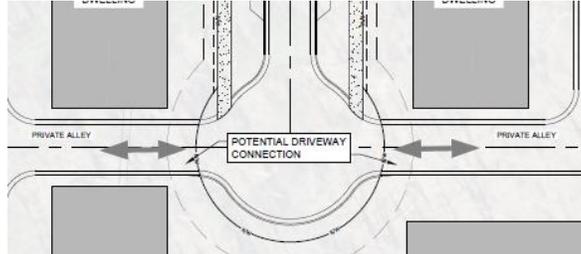

7. Revise site plan and conditional note(s) to commit to constructing right-in/right out turning lane from "potential street connection" to Rozelles Ferry Road in consultation with NCDOT. Median is to extend 50-feet past the curb return on both sides of site access. Final design to be determined during permitting in consultation with NCDOT and CDOT. Add a conditional note to committing to this improvement along with adding dimensions and callouts to the site plan. Both callouts and conditional notes are to provide details of this improvement.

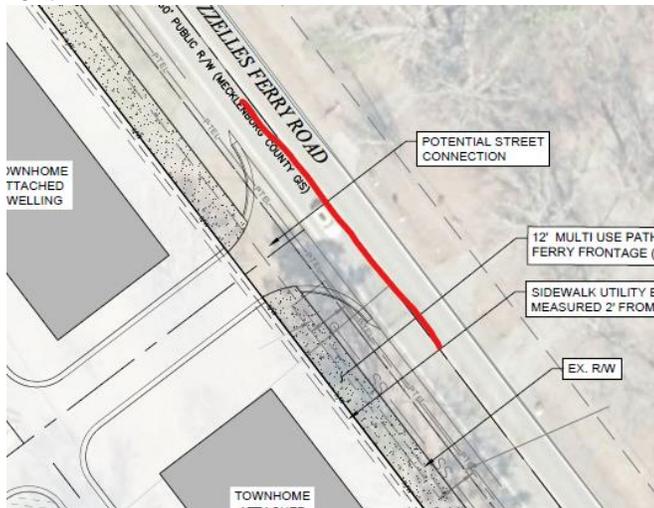

- ~~8. Add a conditional note specifying "the Petitioner shall dedicate and convey in fee simple all rights-of-way to the City before the site's first building certificate of occupancy is issued. CDOT requests rights-of-way set at 2' behind back of sidewalk where feasible."~~
- ~~9. Add a conditional note specifying "All transportation improvements will be approved and constructed before the site's first building certificate of occupancy is issued."~~

The petitioner may phase transportation improvements if said improvements and phasing are approved by CDOT and explicitly described in site plan notes.

- ~~10. Add conditional note specifying "All public roadway improvements will be subject to the standards and criteria of CDOT and NCDOT, as applicable, to the roadway improvements within their respective road system authority. It is understood that such improvements may be undertaken by the Petitioner on its own or in conjunction with other development or roadway projects taking place within the broad north western Mecklenburg area, by way of a private/public partnership effort or other public sector project support."~~

Rezoning Transportation Analysis

Petition Number: 2025-117

General Location Identifier: 03119110, 03119129, 03119109, 03119117, 03119108

Advisory Information

The following are requirements of the developer that must be satisfied prior to driveway permit approval. These requirements shall be reflected on the rezoning plan, as appropriate.

1. CDOT has the authority to regulate/approve all private street/driveway and public street connections to the right-of-way of a street under the regulatory jurisdiction of the City of Charlotte, per the City of Charlotte Unified Development Ordinance.
2. Adequate sight triangles must be reserved at the existing/proposed street entrance(s). Two 50' x 50' sight triangles (and two 10' x 70' sight triangles on NCDOT-maintained streets) are required for the entrance(s) to meet requirements. All proposed trees, berms, walls, fences, and/or identification signs shall not interfere with sight distance at the entrance(s) and shall be identified on the site plan.
3. The proposed driveway connection(s) to public streets will require a driveway permit(s) to be submitted to CDOT (and NCDOT on NCDOT-maintained streets) for review and approval. The exact driveway location(s) and type/width of the driveway(s) will be determined by CDOT during the driveway permit process. The locations of the driveway(s) shown on the site plan are subject to change in order to align with driveway(s) on the opposite side of the street and to comply with City of Charlotte Unified Development Ordinance regulations.
4. All proposed commercial driveway connections to a future public street will require a driveway permit submitted to CDOT for review and approval.
5. Any fence or wall constructed along or adjacent to any sidewalk or street right-of-way requires a certificate issued by CDOT.
6. To obtain a street and pedestrian lighting recommendation, the petitioner should visit the following link: <https://charlottenc.gov/Transportation/Programs/Pages/StreetLighting.aspx>