


SITE DATA TABLE	
PARCEL ID	219-091-26, 219-091-27, 219-091-28, 219-091-29
LOCATION	HAMILTON AND STEELE CREEK ROAD
JURISDICTION	CHARLOTTE
OWNER	KINGER HOMES LLC
ZONING	UR-1 (CD)
TOTAL PARCEL AREA	7.691 AC - 334,976 SF
PROPOSED USE	SINGLE FAMILY ATTACHED TOWNHOMES
PROPOSED BUILDING PRODUCT	2-STORY TOWNHOUSE
UNIT DENSITY	32 UNITS TOTAL (4.16 UPA)
MIN. FRONT / STREET SETBACK	30'
MIN. SIDE SETBACK	5'
MIN. REAR SETBACK	10'
MAX. BUILDING HEIGHT	40'
MIN. PRIVATE OPEN SPACE	400 SF / UNIT
PARKING SPACES PROVIDED	116 SPACES (2 SPACES/ GARAGE (32 GARAGES), 3 SPACES/ DRIVEWAY (20 DRIVEWAYS), 12 VISITOR SPA
REQUIRED TREE SAVE	15% - (50,246 SF - 1.15 AC)
FEMA MAP NUMBER	3710447900K
FEMA MAP DATE	9/2/2015
SOIL TYPES	CeB2 (65%), ApB (35%)
TRASH COLLECTION	TRASH: (1) 8 CY DUMPSTER - RECYCLE: 144 SF
BUFFER REQUIREMENTS	WEST & SOUTH: 42' TYPE C BUFFER
	EAST & NORTH: NO BUFFER
ALL ARCHITECTURA	nl Design Standards Shall Apply
SITE LIGHTING BY OTHERS & SHALI	L COMPLY WITH LAND DEVELOPMENT STANDARDS
PROJECT TO BE	E DEVELOPED IN TWO(2) PHASES

NOTE:

1. SITE HAS BEEN PREVIOUSLY REZONED. REZONING CASE 2018-077. 2. TYPICAL UNIT SIZE IS 30' X 51' (EXTERIOR UNIT) AND 26' X 51' (INTERIOR UNIT).

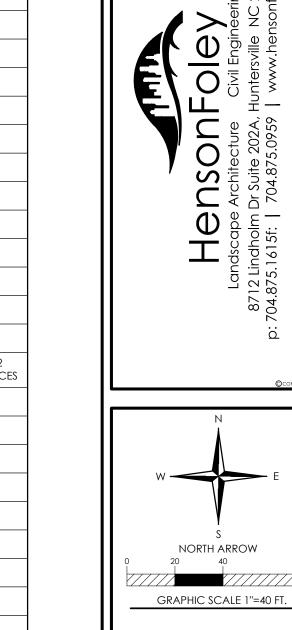

HAMILTON PARK

PRELIMINARY

NOT FOR

CONSTRUCTION

REVISIONS:

C03 - SITE PLAN.DWG PROJECT NUMBER: 220062

DATE: 1/09/2020 DRAWN BY: SW

Know what's **below**. **Call** before you dig

CONTRACTOR IS FULLY RESPONSIBLE FOR CONTACTING APPROPRIATE PARTIES AND ASSURING THAT EXISTING UTILITIES ARE LOCATED PRIOR TO BEGINNING CONSTRUCTION.

CONTRACTOR IS RESPONSIBLE FOR PLACING BARRICADES USING FLAGMEN, ETC., AS NECESSARY TO INSURE SAFETY TO THE PUBLIC. ALL PAVEMENT CUTS, CONCRETE OR ASPHALT, ARE TO BE REPLACED ACCORDING TO STANDARDS OF THE DEPARTMENT OF TRANSPORTATION. SHORING WILL BE ACCORDING TO OSHA TRENCHING STANDARDS PART 1926 SUBPART P, OR AS AMENDED.

PROJECT BOUNDARY

CURB AND GUTTER — — — — BUILDING SETBACK IRRIGATION CONDUIT

PROPOSED BUILDING

— — — — EXISTING SURVEY

STOP SIGN W/ WHITE STOP BAR XX PARKING ROW C COMPACT CAR SPACE PARKING SYMBOL

BUILDING HATCH

FULL DEPTH ASPHALT

HEAVY DUTY PAVEMENT

LEGEND

THESE DEVELOPMENT STANDARDS FORM PART OF THE REZONING PLAN ASSOCIATED WITH THE REZONING PETITION FILED BY KINGER HOMES LLC (THE "PETITIONER") TO ACCOMMODATE THE DEVELOPMENT OF A RESIDENTIAL TOWNHOME COMMUNITY ON APPROXIMATELY 7.691-ACRE SITE LOCATED ON 15500 & 15510 STEELE CREEK RD, 13301 & 13315 HAMILTON RD, CHARLOTTE NC 28278, WHICH IS MORE PARTICULARLY DEPICTED ON THE REZONING PLAN (THE "SITE"). THE SITE IS COMPRISED OF TAX PARCEL NUMBERS 21909127, 21909126, 21909128, 21909129.

DEVELOPMENT OF THE SITE SHALL BE GOVERNED BY THE REZONING PLAN, THESE DEVELOPMENT STANDARDS AND THE APPLICABLE PROVISIONS OF THE CITY OF CHARLOTTE ZONING ORDINANCE (THE "ORDINANCE"). UNLESS THE REZONING PLAN OR THESE development standards establish more stringent standards, the regulations established under the ordinance for the UR-1 (CD) ZONING DISTRICT SHALL GOVERN ALL DEVELOPMENT TAKING PLACE ON THE SITE.

THE DEVELOPMENT DEPICTED ON THE REZONING PLAN IS SCHEMATIC IN NATURE AND INTENDED TO DEPICT THE GENERAL ARRANGEMENT OF USES AND IMPROVEMENTS ON THE SITE. ACCORDINGLY, THE CONFIGURATIONS, PLACEMENTS AND SIZES OF THE BUILDING FOOTPRINTS AS WELL AS THE INTERNAL PUBLIC STREETS AND THE INTERNAL PRIVATE STREETS, ALLEYS OR DRIVES DEPICTED ON THE REZONING PLAN ARE SCHEMATIC IN NATURE AND, SUBJECT TO THE TERMS OF THESE DEVELOPMENT STANDARDS AND THE ORDINANCE, ARE SUBJECT TO MINOR ALTERATIONS OR MODIFICATIONS DURING THE DESIGN DEVELOPMENT AND CONSTRUCTION DOCUMENT PHASES.

FUTURE AMENDMENTS TO THE REZONING PLAN AND/OR THESE DEVELOPMENT STANDARDS MAY BE APPLIED FOR BY THE THEN OWNER OR OWNERS OF THE SITE IN ACCORDANCE WITH THE PROVISIONS OF SECTION 6.207 OF THE ORDINANCE.

2. PERMITTED USES AND MAXIMUM DEVELOPMENT THE SITE MAY BE DEVELOPED WITH UP TO 32 SINGLE-FAMILY ATTACHED DWELLING UNITS (TOWNHOMES), TOGETHER WITH ANY

INCIDENTAL AND ACCESSORY USES RELATED THERETO THAT ARE ALLOWED IN THE UR-1 (CD) ZONING DISTRICT.

A) VEHICULAR ACCESS WILL BE AS GENERALLY DEPICTED ON THE REZONING PLAN. THE PLACEMENT AND CONFIGURATION OF THE VEHICULAR ACCESS POINT SHOWN ON THE REZONING PLAN IS SUBJECT TO ANY MINOR MODIFICATIONS REQUIRED TO ACCOMMODATE FINAL SITE AND CONSTRUCTION PLANS AND DESIGNS AND TO ANY ADJUSTMENTS REQUIRED BY CDOT AND/OR

B) AS DEPICTED ON THE REZONING PLAN, THE SITE WILL BE SERVED BY PUBLIC AND/OR PRIVATE STREETS.

C) INTERNAL SIDEWALKS AND PEDESTRIAN CONNECTIONS SHALL BE PROVIDED ALONG ALL PUBLIC AND PRIVATE STREETS THROUGHOUT THE SITE. THE INTERNAL SIDEWALKS MAY MEANDER TO SAVE EXISTING TREES.

D) WHERE NECESSARY, PETITIONER SHALL DEDICATE AND CONVEY IN FEE SIMPLE ALL RIGHTS-OF-WAY TO THE CITY OF CHARLOTTE BEFORE THE SITE'S FIRST BUILDING CERTIFICATE OF OCCUPANCY IS ISSUED OR PHASED PER THE SITE'S DEVELOPMENT PLAN. THE RIGHT-OF-WAY SHALL BE SET AT 2 FEET BEHIND THE BACK OF SIDEWALK WHERE FEASIBLE.

E) UNLESS OTHERWISE STATED HEREIN, ALL TRANSPORTATION IMPROVEMENTS ON THE REZONING PLAN SHALL BE APPROVED AND CONSTRUCTED PRIOR TO THE ISSUANCE OF THE FIRST CERTIFICATE OF OCCUPANCY FOR PRINCIPAL BUILDINGS WITHIN THE SITE.

F) AS DEPICTED ON THE REZONING PLAN, PETITIONER WILL COMMIT TO CONSTRUCT AN 8-FT PLANTING STRIP AND 12-FT MULTI-USE PATH ALONG ROAD FRONTAGE OF HAMILTON ROAD AND STEELE CREEK ROAD. THE REZONING PLAN IS SUBJECT TO ANY MINOR MODIFICATIONS REQUIRED TO ACCOMMODATE FINAL SITE AND CONSTRUCTION PLANS AND DESIGNS AND TO ANY ADJUSTMENTS REQUIRED BY CDOT AND/OR NCDOT FOR APPROVAL.

G) ROAD IMPROVEMENTS ALONG HAMILTON ROAD WILL BE GENERALLY DEPICTED ON THE REZONING PLAN. FINAL DESIGN AND CONFIGURATION IS SUBJECT TO ANY MODIFICATIONS REQUIRED TO ACCOMMODATE FINAL SITE AND CONSTRUCTION PLANS AND DESIGNS AND TO ANY ADJUSTMENTS REQUIRED BY CDOT AND/OR NCDOT FOR APPROVAL.

NCDOT FOR APPROVAL.

A) THE PRINCIPAL BUILDINGS USED FOR RESIDENTIAL USES CONSTRUCTED ON THE SITE MAY USE A VARIETY OF BUILDING MATERIALS. THE BUILDING MATERIALS USED FOR BUILDINGS MAY BE A COMBINATION OF THE FOLLOWING: GLASS, BRICK, STONE, SIMULATED STONE, PRE-CAST STONE, PRE-CAST CONCRETE, SYNTHETIC STONE, STUCCO, CEMENTITIOUS SIDING (SUCH AS HARDI-PLANK), VINYL, EIFS OR

B) EACH ATTACHED RESIDENTIAL DWELLING UNIT SHALL BE PROVIDED WITH AT LEAST A 2 CAR GARAGE.

- C) TOWNHOUSE BUILDINGS WILL BE LIMITED TO 4 INDIVIDUAL UNITS OR FEWER OR WILL BE DIFFERENTIATED BETWEEN UNITS, INCLUDING, BUT NOT LIMITED TO, FORWARD OFFSETS IN THE FRONT WALLS OF UNITS, VERTICAL HEIGHT DIFFERENCES, OR ARCHITECTURAL DIFFERENCES IN ELEVATIONS (SUCH AS WINDOWS, DOORS, BAYS, TRIM, OR MATERIALS).
- D) USABLE PORCHES AND STOOPS SHALL FORM A PREDOMINANT FEATURE OF THE BUILDING DESIGN AND BE LOCATED ON THE FRONT AND/OR REAR OF THE BUILDING. USABLE FRONT PORCHES SHALL BE COVERED AND BE AT LEAST 6 FEET DEEP.

5. <u>OPEN SPACE, STREETSCAPE AND LANDSCAPING</u>
A) THE PETITIONER SHALL COMPLY WITH THE TREE ORDINANCE AND POST CONSTRUCTION STORMWATER ORDINANCE.

B) 15% TREE SAVE TO BE PRESERVED ON SITE.

- A) ALL FREESTANDING LIGHTING FIXTURES INSTALLED ON THE SITE (EXCLUDING LOWER, DECORATIVE LIGHTING THAT MAY BE INSTALLED ALONG THE DRIVEWAYS AND SIDEWALKS AND LANDSCAPING LIGHTING) SHALL BE FULLY CAPPED AND SHIELDED AND THE ILLUMINATION DOWNWARDLY DIRECTED SO THAT DIRECT ILLUMINATION DOES NOT EXTEND PAST ANY PROPERTY LINE OF THE SITE.
- B) THE MAXIMUM HEIGHT OF ANY FREESTANDING LIGHTING FIXTURES INSTALLED ON THE SITE, EXCLUDING STREET LIGHTS LOCATED ALONG PUBLIC STREETS, SHALL BE 21 FEET.

FUTURE AMENDMENTS TO THE TECHNICAL DATA SHEET OR THESE DEVELOPMENT STANDARDS MAY BE APPLIED FOR BY THE THEN OWNER OR OWNERS OF THE PARCEL OR PARCELS WITHIN THE SITE INVOLVED IN ACCORDANCE WITH THE PROVISIONS OF CHAPTER 6 OF THE

FURTHER ALTERATIONS OR MODIFICATIONS TO THIS REZONING PLAN WHICH, IN THE OPINION OF THE PLANNING DIRECTOR, SUBSTANTIALLY ALTER THE CHARACTER OF THE DEVELOPMENT OR SIGNIFICANTLY ALTER THE TECHNICAL DATA SHEET OR ANY OF ITS CONDITIONS OR WHICH INCREASE THE INTENSITY OF DEVELOPMENT SHALL NOT BE DEEMED TO BE MINOR AND MAY ONLY BE MADE IN ACCORDANCE WITH THE PROVISIONS OF SUBSECTIONS 6.207(1) OR (2) OF THE ORDINANCE, AS APPLICABLE.

A) THE LOCATION, SIZE, AND TYPE OF STORM WATER MANAGEMENT SYSTEMS DEPICTED ON THE REZONING PLAN ARE SUBJECT TO REVIEW AND APPROVAL AS PART OF THE FULL DEVELOPMENT PLAN SUBMITTAL AND ARE NOT IMPLICITLY APPROVED WITH THIS REZONING. ADJUSTMENTS MAY BE NECESSARY IN ORDER TO ACCOMMODATE ACTUAL STORM WATER TREATMENT REQUIREMENTS

AND NATURAL SITE DISCHARGE POINTS.

B) DEVELOPMENT WITHIN ANY SWIM/PCSO BUFFER SHALL BE COORDINATED WITH AND SUBJECT TO APPROVAL BY CHARLOTTE-MECKLENBURG STORM WATER SERVICES AND MITIGATED IF REQUIRED BY CITY ORDINANCE.

C) DEVELOPMENT OF THE SITE SHALL COMPLY WITH THE TREE ORDINANCE.

- 9. BINDING EFFECT OF THE REZONING DOCUMENTS AND DEFINITIONS A) IF THIS REZONING PLAN IS APPROVED, ALL CONDITIONS APPLICABLE TO DEVELOPMENT OF THE SITE IMPOSED UNDER THE TECHNICAL DATA SHEET WILL, UNLESS AMENDED IN THE MANNER PROVIDED UNDER THE ORDINANCE, BE BINDING UPON AND INURE TO THE BENEFIT OF THE PETITIONER AND THE CURRENT AND SUBSEQUENT OWNERS OF THE SITE AND THEIR RESPECTIVE SUCCESSORS IN INTEREST AND ASSIGNS.
- B) THROUGHOUT THESE DEVELOPMENT STANDARDS, THE TERMS, "PETITIONER" AND "OWNER" AND "OWNERS" SHALL BE DEEMED TO INCLUDE THE HEIRS, DEVISEES, PERSONAL REPRESENTATIVES, SUCCESSORS IN INTEREST AND ASSIGNS OF THE PETITIONER OR THE OWNERS OF THE SITE FROM TIME TO TIME WHO MAY BE INVOLVED IN ANY FUTURE DEVELOPMENT THEREOF.

IN THE EVENT LAND IS SOLD WITH ATTACHED UNITS, THE PETITIONER WILL PROVIDE EITHER 400 SQFT OF PRIVATE OPEN SPACE PER UNIT OR PROVIDE USEABLE COMMON OPEN SPACE EQUAL TO AT LEAST 10% OF THE SITE AS REQUIRED BY THE ZONING ORDINANCE

> CONTRACTOR IS RESPONSIBLE FOR PLACING BARRICADES USING **Call** before you dig.

PRELIMINARY CONSTRUCTION

REVISIONS:

C03 - SITE PLAN.DWG

PROJECT NUMBER: 220062 DATE: 1/09/2020 DRAWN BY: SW

1926 SUBPART P, OR AS AMENDED.